

Size 50 to 11,600 cc/rev, up to 250 bar, 36,000Nm, 240kW	Fixed Displacement Radial Piston Hydraulic Motor Staffa, Series B	Data Sheet M-1001/03.00 GB
--	---	----------------------------

**Features**

- ◇ Rugged, reliable, proven design.
- ◇ Unique Hydrostatic balancing provides minimum wear and extended life.
- ◇ High volumetric and mechanical efficiency.
- ◇ Capacities range from 50 to 11600 cc per rev.
- ◇ Large variety of Shaft and Porting options.
- ◇ Output torque up to 36000 Nm.
- ◇ Wide range of mounting interfaces available.
- ◇ Highly accurate electronic positional and velocity control systems also available.



**Description**

The Kawasaki "Staffa" range of high torque low speed fixed displacement radial piston hydraulic motors consists of 13 frame sizes ranging from the HMB010 to HMB700. Capacity ranges from 50 to 11,600cc/rev.

The rugged, well proven design incorporates high efficiency, combined with good breakout torque and smooth running capability.

Various features and options are available including, on request, mountings to match competitors' interfaces.

The Kawasaki "Staffa" range also includes dual and continuously variable displacement motors. To obtain details of this product range please refer to data sheet M-1002

Model Staffa B	Page 1.70	Data Sheet M-1001/03.00
----------------	-----------	-------------------------



**Ordering Code – Staffa Motor Series B**

F11 HM\*B 060 S3 FM3 Tx \* PL\*\*

**Fluid Type**  
 Blank: Mineral oil.  
 F3: Phosphate ester (HFD fluid).  
 F11: Water-based fluids (HFA, HFB & HFC)  
 \* : Consult

**Model Type**  
 Blank: Standard (HMB)  
 HD: Heavy duty (HMHDB)

**Frame Size**  
 (See options page 7)

**Shaft Type**  
 See shaft type option list on Page 3

**Main Port Connections**  
 See Port Connection details on Page 4

**Special Features**  
 PL\*\*: Non-catalogued features, (\*\*)= number assigned as required.  
 eg:  
 Stainless steel shaft sleeves.  
 Alternative port connections.  
 Shaft variants.  
 Alternative displacement.  
 Special mountings.  
 Special paint.

**Design Series Number**

**Tacho/Encoder Drive**  
 Blank: None  
 T: Staffa original tacho drive.  
 Tx: Customer specific encoder drive.



Model  
Staffa B

Page  
2.70

Data Sheet  
M-1001/03.00

**Shaft Options**

**MOTOR TYPE**

**SHAFT DESCRIPTION**

HMB010	P*	=	Parallel keyed shaft Ø 40mm
HMB010	S*	=	Involute spline 13 teeth BS3550
HMB030/045	(H)S*	=	Involute spline 17 teeth to BS3550
HMB030/045	(H)P	=	Parallel keyed shaft Ø 55mm
HMB030/045	(H)Z*	=	Involute spline to DIN5480 (W55x3x17x7h)
HMB045	Q*	=	Internal involute spline 21 teeth to BS3550
HMB060/080/100	(H)P*	=	Parallel keyed shaft Ø 60mm
HMB060/080/100	(H)S*	=	Involute spline 14 teeth to BS3550
HMB060/080/100	(H)Z*	=	Involute spline to DIN5480 (W70x3x22x7h)
HMB060/080/100	(H)Q*	=	Internal involute spline 24 teeth to BS3550
HMB060/080/100/125/150/200/ HMB270/325	T*	=	Long tapered keyed shaft
HMB060/080/100/270/325	X*	=	Short tapered keyed shaft
HMB125/150/200/270/325	(H)P1*	=	Parallel keyed shaft Ø 85mm
HMHDB125/150/200/270 & 325	(H)P2*	=	Parallel keyed shaft Ø 100mm
HMB125/150/200/270/325	(H)S3*	=	Involute spline 20 teeth to BS3550
HMB125/150/200	(H)S4*	=	Involute spline 16 teeth at 20°
HMHDB125/150/200, 270/325	(H)S5*	=	Involute spline 23 teeth to BS3550
HMB125/150/200	(H)Z3*	=	Involute spline to DIN5480 (W85x3x27x7h)
HMHDB125/150/200	(H)Z5*	=	Involute spline to DIN5480 (W100x4x24x7h)
HMHDB125/150/200/270/325	(H)Q*	=	Internal involute spline 34 teeth to BS3550
HMHDB125/150/200/270/325	(H)X*	=	Short taper, keyed shaft
HMB270/325 + HMHDB270/325	(H)Z*	=	Involute spline to DIN5480 (W100x4x24x7h)
HMHDB400	P*	=	Parallel shaft with two keys Ø 100mm
HMHDB400	S*	=	Involute spline 23 teeth to BS3550
HMHDB400	Z*	=	Involute spline to DIN5480 (W100x4x24x7h)
HMHDB400	Q*	=	Internal involute spline 31 teeth to BS3550
HMHDB400	X*	=	Tapered keyed shaft
HMB700	Z*	=	Involute spline to DIN5480 (W120x4x28x7h)
HMB700	P	=	Parallel keyed shaft at 120° 120 Ø

Notes:

\* - For installations where shaft is vertically upwards specify "V" after shaft type letter to ensure that additional high level drain port is provided.

(H) - Use "H" prefix code as noted to specify "hollow" shaft with through hole Ø 26.2. Hollow shafts are available only with type "S04" main port connection.

For all shaft dimensions see the motor installation drawings



Model  
Staffa B

Page  
3.70

Data Sheet  
M-1001/03.00

**Main Port Connections****Product Type****HMB010**

Blank = Two, four bolt flange ports of 20mm Ø

**HMB030 Mono bloc**

Blank = Rear entry ports G 3/4" (BSPF)  
 F = Side port SAE 1" -4 Bolt (UNC) flange  
 FM = Side port SAE 1" -4 Bolt (Metric) flange

**HMB045 Mono bloc**

Blank = Rear entry ports G 1" (BSPF)  
 D = Dual entry ports G 1" (BSPF)

**HMB030/045 Two part build (TPB)**

See detail below

**HMB060/080/100**

F2 = SAE 1", 4 Bolt (UNC) flanges  
 FM2 = SAE 1", 4 Bolt (Metric) flanges  
 S03 = 6-Bolt (UNF) flange. (Staffa original valve housing)  
 F3 = SAE 1 1/4" 4 Bolt (UNC) flanges  
 FM3 = SAE 1 1/4" 4 Bolt (Metric) flanges  
 S04<sup>(1)</sup> = 6 Bolt (UNF) flanges. (Staffa original valve housing)

**HMB125/150/200 + Heavy Duty Variants** Details as above, plus the following:

F4 = SAE 1 1/4" 4 Bolt (UNC) flanges  
 FM4 = SAE 1 1/2" 4 Bolt (Metric) flanges

**HMB270/325 + Heavy Duty Variants**

F4 = SAE 1 1/2" 4 Bolt (UNC) flanges  
 FM4 = SAE 1 1/2" 4 Bolt (Metric) flanges  
 S04<sup>(1)</sup> = 6 Bolt (UNF) flanges. (Staffa original valve housing)

**HMHDB400**

Blank = Combined 6-Bolt flange and 4 Bolt SAE connection  
 Ports "B" and "C" 6-Bolt UNF flange  
 Ports "A" and "C" SAE, 2" 4-Bolt UNF flanges  
 S045 = 2 x 6 Bolts (UNF) flanges (2 inlet and 2 outlet ports available)

**HMB700**

FM = Standard code 62  
 SAE 2" 4 Bolt (Metric) flanges

Note:<sup>(1)</sup>

Obligatory for hollow shafts type: HP, HS, HZ or HQ













Model  
Staffa B

Page  
4.70

Data Sheet  
M-1001/03.00

**.Functional Symbols**

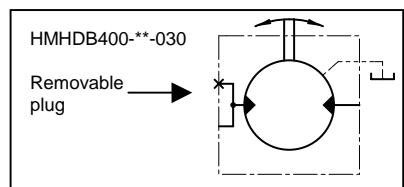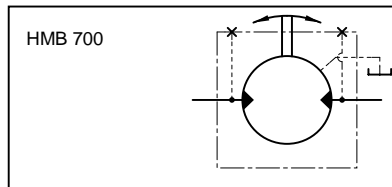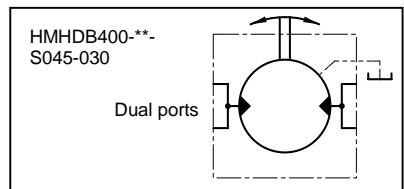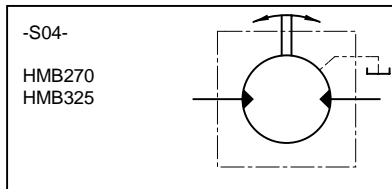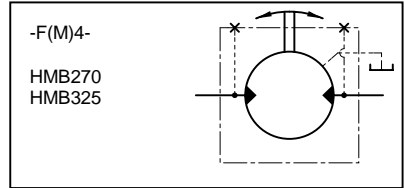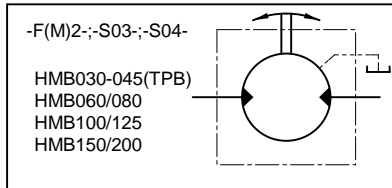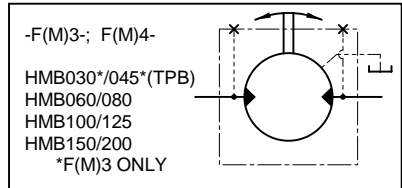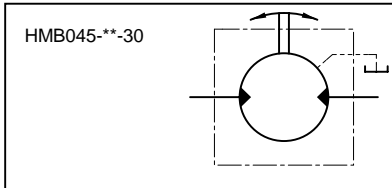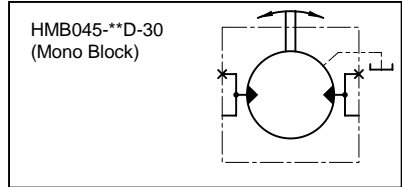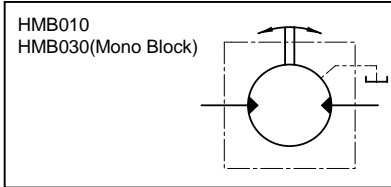

Model  
Staffa

Page  
5.70

Data Sheet  
M-1001/03.00



**Performance Data****Intermittent max pressure**

B010 up to 241 bar

B700 up to 250 bar

All other models to 293 bar.

These pressures are allowable on the following basis:

- (a) Up to 50 r/min: 15% duty for periods up to 5 minutes maximum.
- (b) Over 50 r/min: 2% duty for periods up to 30 seconds maximum.

**Continuous rating**

For continuous duty the motor must be operating within each of the maximum values for speed, pressure and power.

**Intermittent rating**

Operation within the intermittent power rating (up to the maximum continuous speed) is permitted on a 15% duty basis, for periods up to 5 minutes maximum.

**Limits for fire resistant fluids**

Fluid Type	Pressure, bar		Max Speed r/min	Model type
	Continuous	Intermittent		
HFA 5/95% oil in emulsion	103	138	50% of limits for Mineral Oil	All models
HFB 60/40 water in oil emulsion	138	172	As for Mineral Oil	All models
HFC water glycol	103	138	50% of limits or Mineral Oil	All models
HFD phosphate ester	207	241	As for Mineral Oil	B010
	207	293		B030
	250	293		B045 to B400 inc.
	210	250		B700

## Performance Data Tables

Motor type	Geometric displacement (cc/rcv)	Average actual running torque (Nm/bar)	Max. continuous speed (rev/min)	Max. continuous output (kW)	Max. continuous pressure. (bar)	Max. intermittent pressure (bar)
<b>B10</b>	188	2.79	500	25	207	241
<b>B030</b>	442	6.56	450	42	207	293
<b>B045</b>	740	10,95	400	60	250	293
<b>B060</b>	983	14.5	300	80	250	293
<b>B060 F2/FM2</b>	983	14.5	200	75	250	293
<b>B080</b>	1344	19.9	300	100	250	293
<b>B080 F2/FM2</b>	1344	19.9	150	77	250	293
<b>B100</b>	1639	24.3	250	110	250	293
<b>B100 F2/FM2</b>	1639	24.3	125	80	250	293
<b>B125</b>	2050	30.66	220	100	250	293
<b>B125 F2/FM2</b>	2050	30.66	100	75	250	293
<b>B150</b>	2470	36.95	220	115	250	293
<b>B150 F3/FM3/S03</b>	2470	36.95	168	115	250	293
<b>B150 F2/FM2</b>	2470	36.95	80	75	250	293
<b>B200</b>	3080	46.07	175	130	250	293
<b>B200 F3/FM3/S03</b>	3080	46.07	135	130	250	293
<b>B200 F2/FM2</b>	3080	46.07	65	75	250	293
<b>B270</b>	4310	63.79	125	140	250	293
<b>B325</b>	5310	79.4	100	140	250	293
<b>B400</b>	6800	101	120	190	250	293
<b>B700</b>	11600	171.7	100	240	210	250

Model  
StaffaPage  
7.70Data Sheet  
M-1001/03.00


**Kawasaki**  
Hydraulic Products

## Non-Standard Displacements

Motor	Displacements cc/rev								
HMB010	177	130	94	50					
HMB030	492	477	455	330	320	300	278	251	213
HMB045	800	700	634	570	500	440			
HMB080	1250	1100	1000						
HMB100	1530	1500							
HMB125	1800								
HMB150	1880	2130							
HMB200	3630*	2870							
HMHDB200	3630*	2785							
HMB270	4588	4500	3688	3600					
HMHDB270	4000								
HMB325	6100*	5187							
HMHDB400	6137	6468	5322	4340	4000	8000*			
HMB700	10600	9600	8850						

Note:

\* Reduced pressure and power rating.

Model  
StaffaPage  
8.70Data Sheet  
M-1001/03.00



**Kawasaki**  
Hydraulic Products




**Output Torque**

These torque curves indicate the maximum output torque and power of a fully run-in motor for a range of pressures and speeds when operating with zero outlet pressure on Mineral Oil of 50 cSt (232 SUS) viscosity. High return line pressures will reduce torque for a given pressure differential. – x – x – x – Upper limit of continuous rating envelope.


**B010**

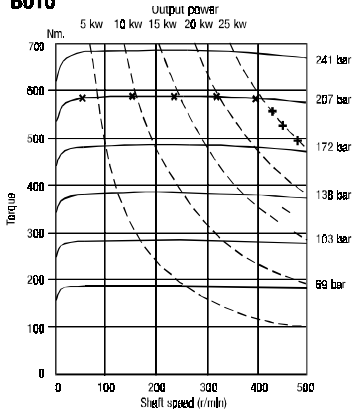


**B030**

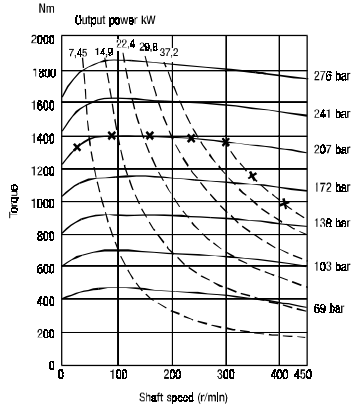

**B045**

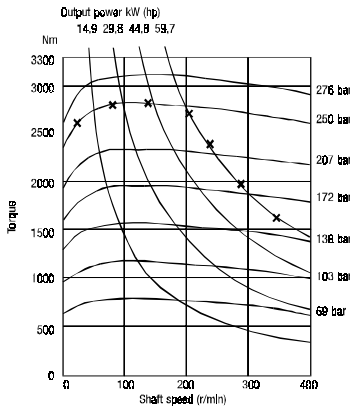

**B060**

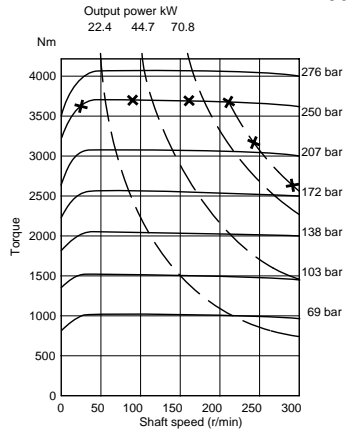

Model  
Staffa


Page  
9.70

Data Sheet  
M-1001/03.00




Output Torque (continued)


**B080**

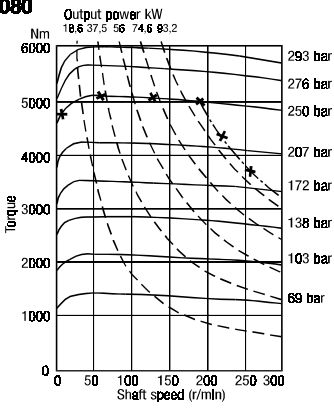


**B100**

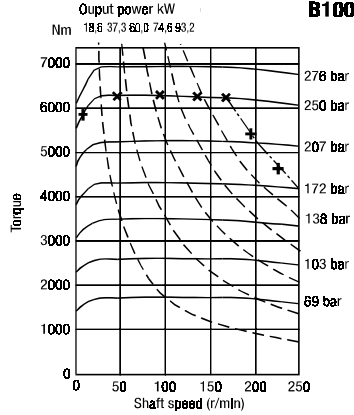

**B125**

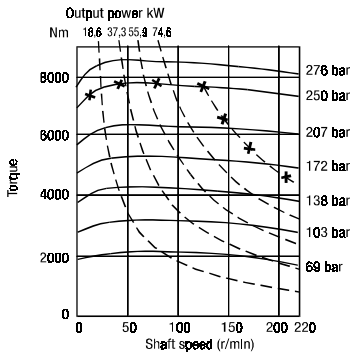

**B150**

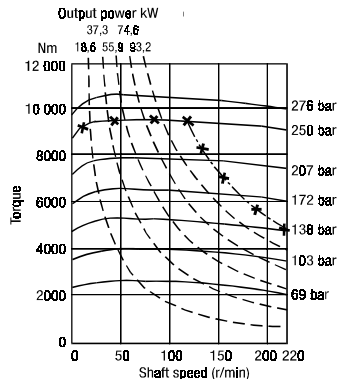

Model  
Staffa


Page  
10.70

Data Sheet  
M-1001/03.00




Output Torque (continued)


**B200**

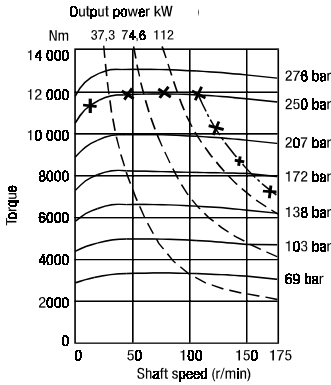


**B270**

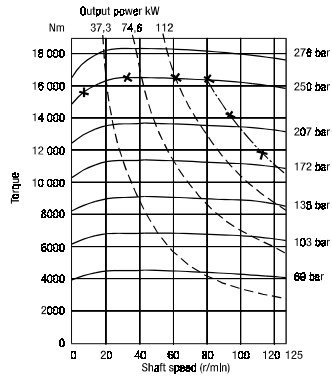

**B325**

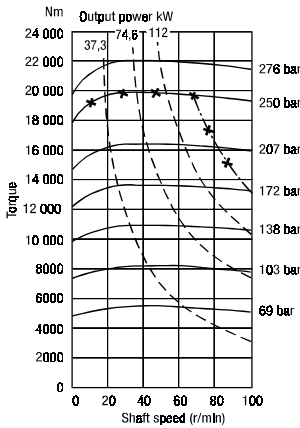

**B400**

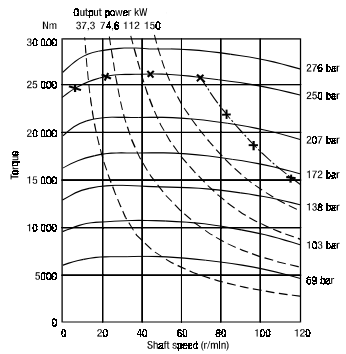

Model  
Staffa


Page  
11.70

Data Sheet  
M-1001/03.00



Output Torque (continued)

**B700**

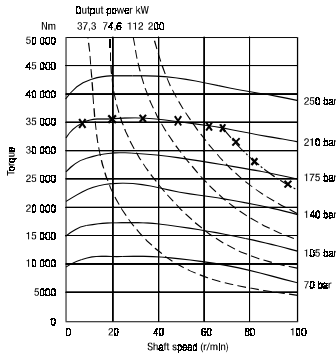



Model  
Staffa

Page  
12.70

Data Sheet  
M-1001/03.00



**Bearing Life Graphs**  
**HMB 010 Shaft Types P and S**

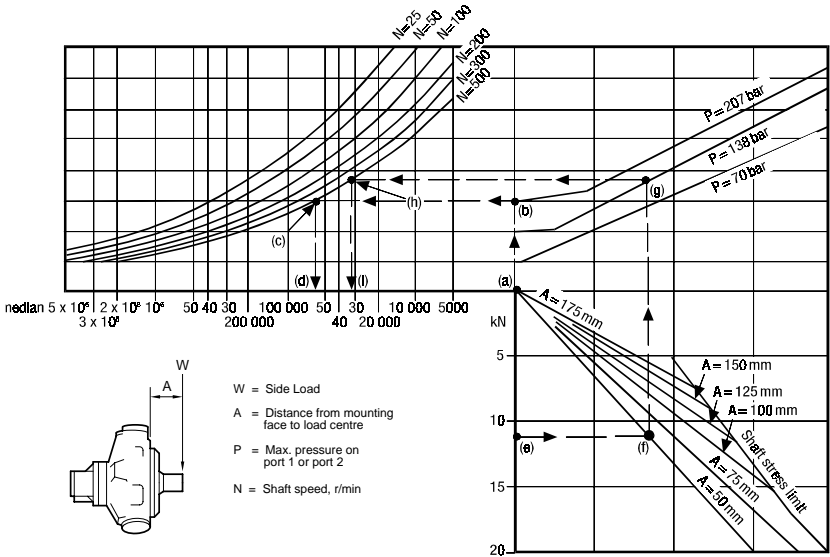

W = Side Load  
 A = Distance from mounting face to load centre  
 P = Max. pressure on port 1 or port 2  
 N = Shaft speed, r/min

**Example 1 (follow chain dotted line):**

- Side load (W) (a) 0
- System pressure (P) (b) 207 bar
- Speed (N) (c) 500 r/min.
- Median bearing life (d) 55,000 hrs.
- L10 bearing rating = median x 0.2 (d) 11,000 hrs.

**Example 2 (follow chain dotted line):**


- Side load (W) (e) 11 kN
- Load offset (A) from motor mounting face (f) 50 mm
- System pressure (P) (g) 138 bar
- Speed (N) (h) 500 r/min.
- Median bearing life (i) 31,000 hrs.
- L10 bearing rating = median x 0.2 (i) 6,200 hrs

Model Staffa	Page 13.70	Data Sheet M-1001/03.00
--------------	------------	-------------------------




**Bearing Life Graphs (continued)**

**HMB030 Shaft Types P, S, and Z**

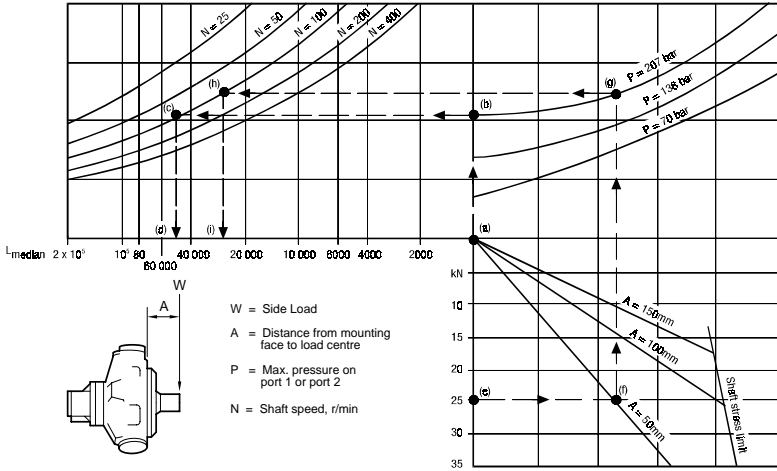

**HMB045 Shaft Types P, S, and Z**

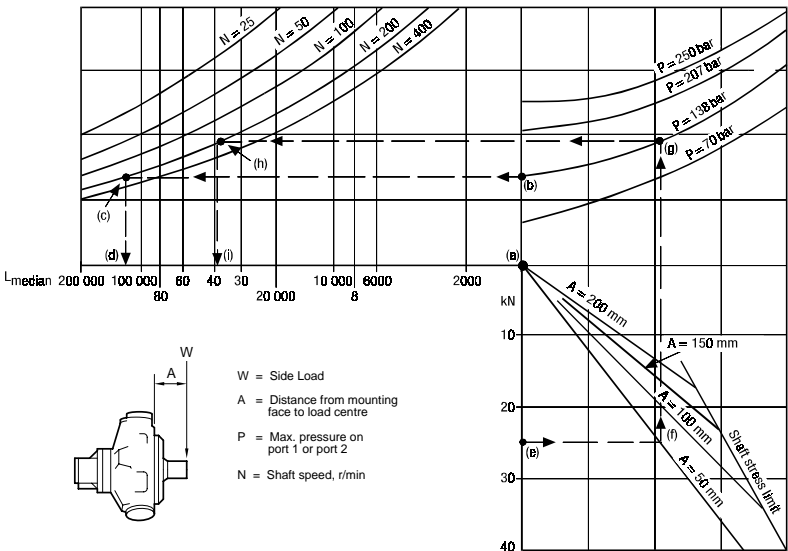


Model  
Staffa

Page  
14.70


Data Sheet  
M-1001/03.00

**Bearing Life Graphs (continued)**

**HMB 060, HMB080, HMB100 Shaft Types P, S, Z, X**

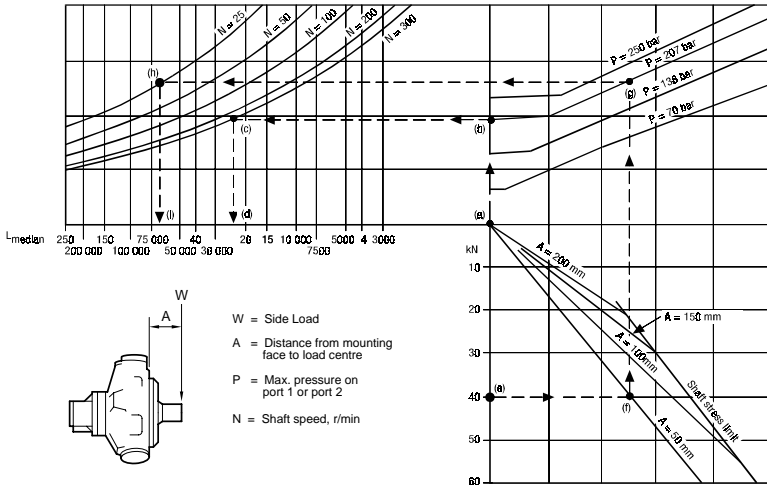

**HMB125, HMB 150, HMB200 Shaft Types P1, S3, S4, Z3, T**

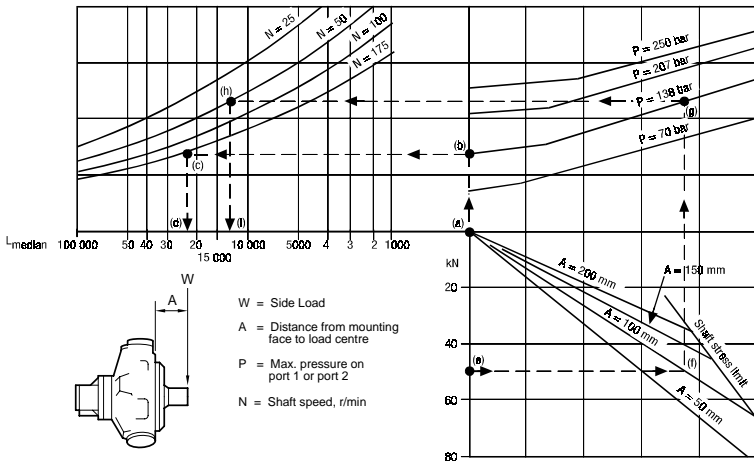


Model Staffa

Page 15.70


Data Sheet M-1001/03.00

**Bearing Life Graphs (continued)**

**HMHDB125, 150, 200 Shaft Types S5, Z5 and P2**

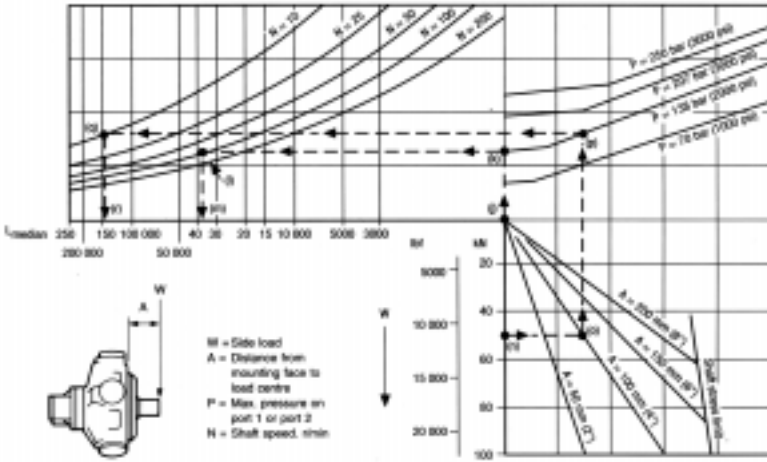

**HMB270, HMB325 Shaft Types P1, S3, Z, T, X**

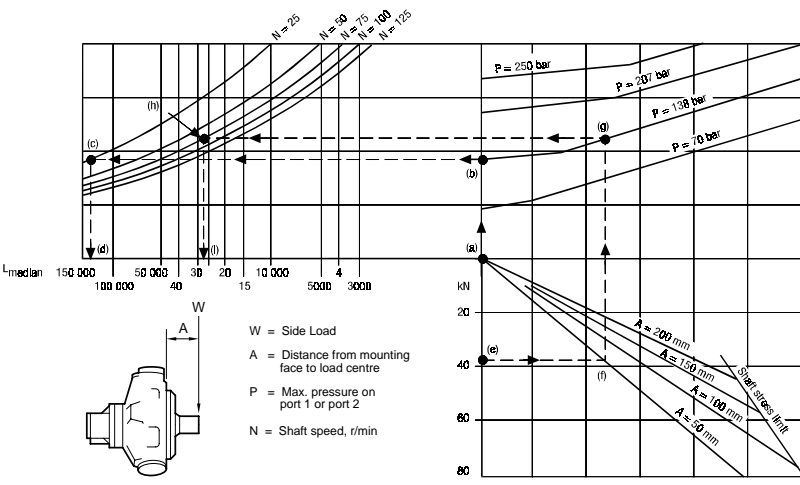

Model Staffa


Page 16.70

Data Sheet M-1001/03.00




**Bearing Life Graphs (continued)**

**HMHDB270, 325 Shaft Type P2, S5, Z and X**

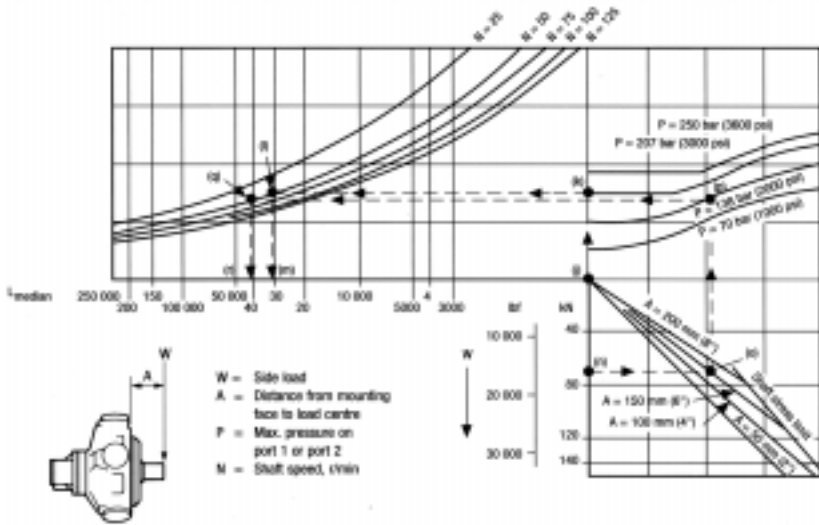

**HMHDB400 Shaft Types P, S, Z, and X**

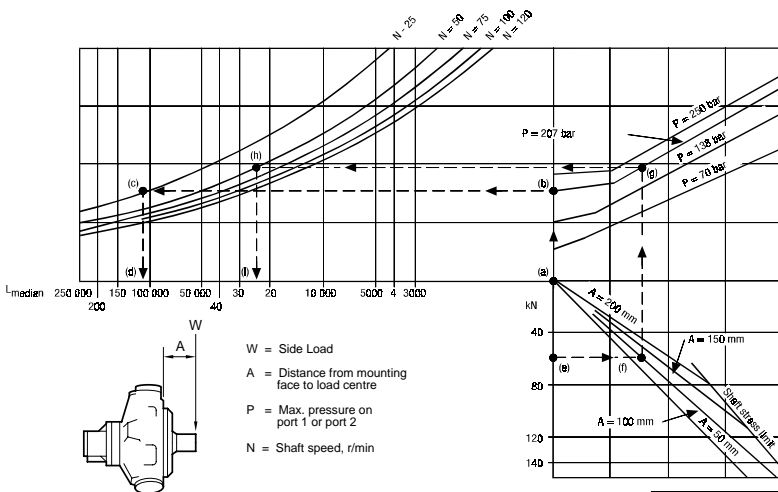

Model Staffa


Page 17.70

Data Sheet M-1001/03.00



**Bearing Life Graphs (continued)**

**HMB700 Shaft Type P and Z**

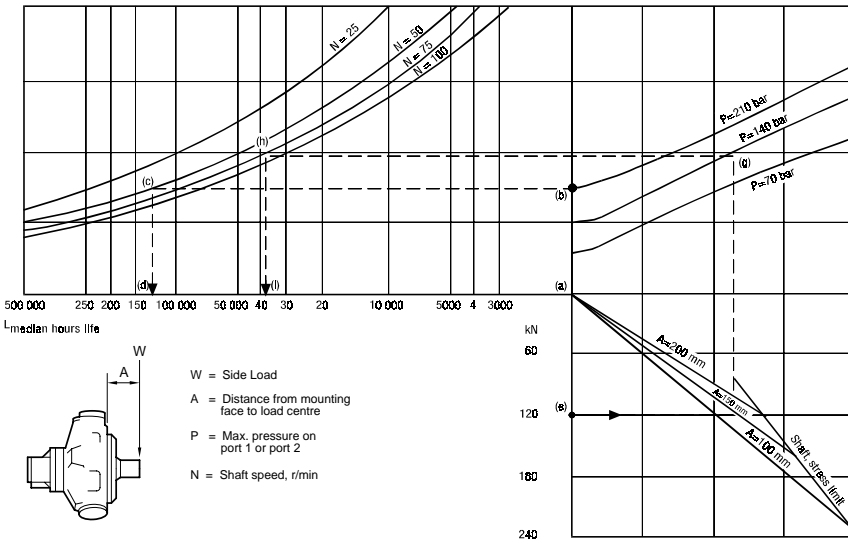

Model Staffa


Page 18.70

Data Sheet M-1001/03.00

**Volumetric Efficiency**

These nomographs enable the average volumetric efficiency, crankcase (drain) leakage and “winch slip”/shaft creep speed to be estimated. The shaft creep occurs when the load attempts to rotate the motor against the closed ports as may occur, for example in winch applications.

**B010**

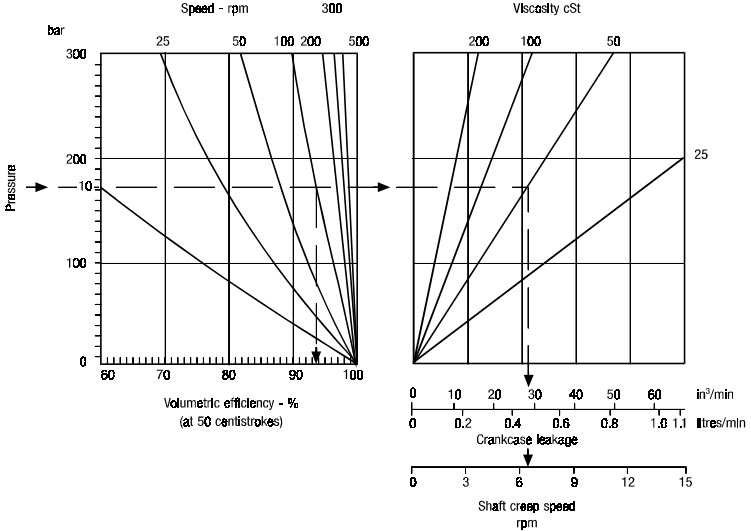

Example (follow chain dotted line):

Given:

1. Pressure .....175 bar
2. Speed .....100 r/min
3. Viscosity .....50 cSt (232 SUS)

To obtain:

4. Volumetric efficiency .....94.2%
5. Crankcase leakage ..... 0.451 l/min (27.4 in<sup>3</sup>/min)
6. Shaft creep speed .....6.4 r/min

Model  
Staffa


Page  
19.70

Data Sheet  
M-1001/03.00




**Volumetric Efficiency (continued)**

**B030**

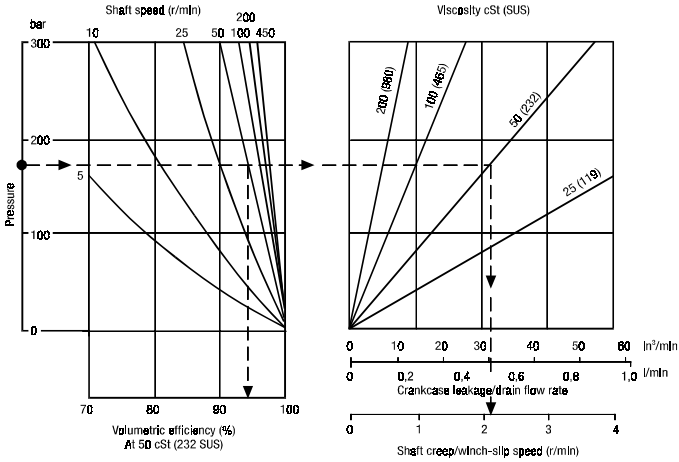

**B045**

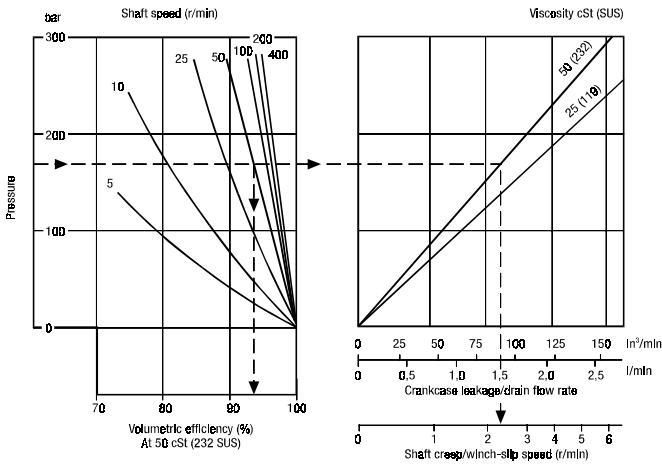


Model  
Staffa

Page  
20.70


Data Sheet  
M-1001/03.00

Volumetric Efficiency (continued)

B060

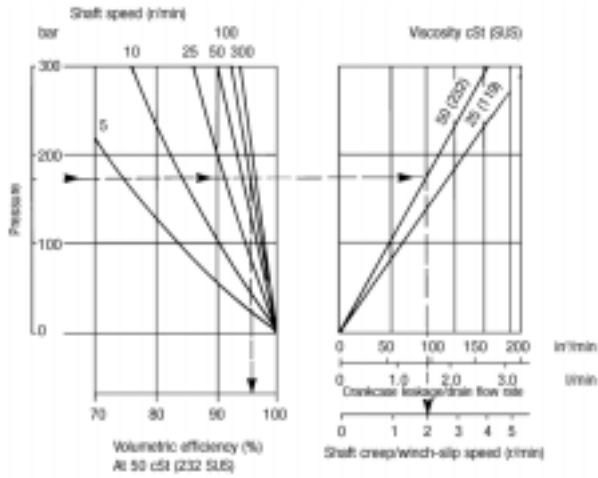

B080

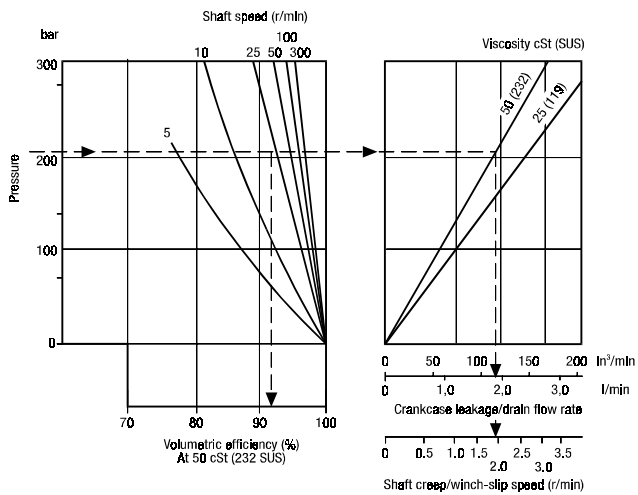


Model Staffa

Page 21.70


Data Sheet M-1001/03.00

**Volumetric Efficiency (continued)**

**B100**

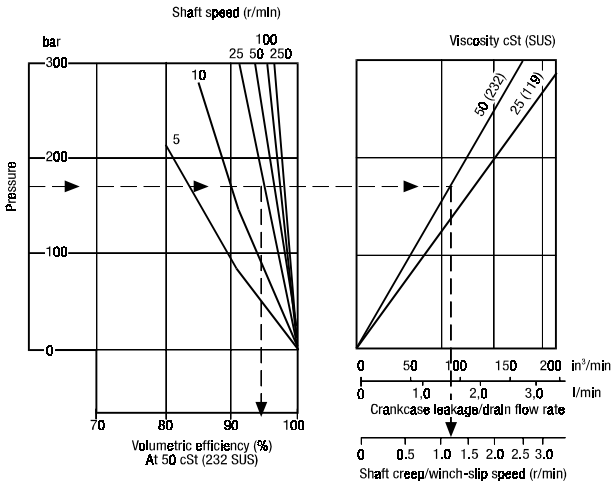

**B125**

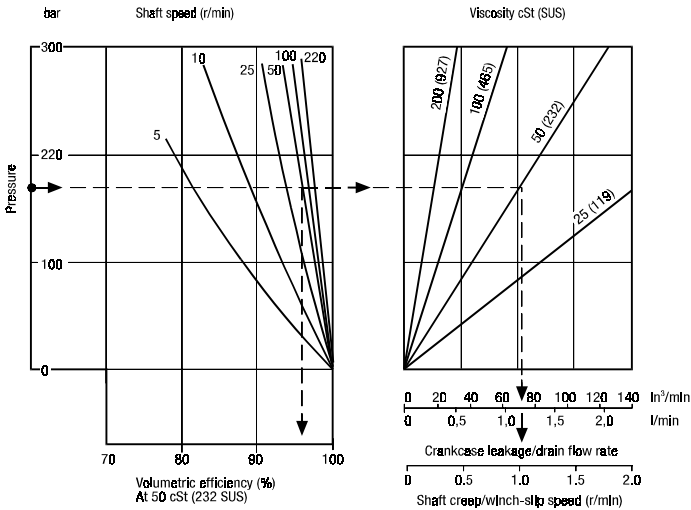


Model Staffa

Page 22.70


Data Sheet M-1001/03.00

**Volumetric Efficiency (continued)**

**B150**

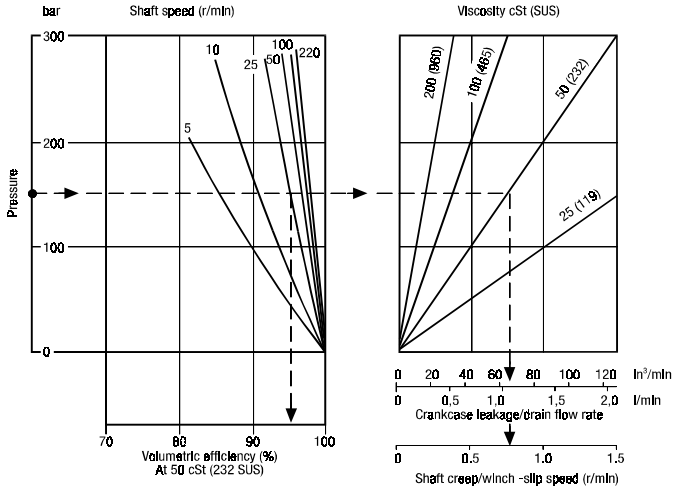

**B200**

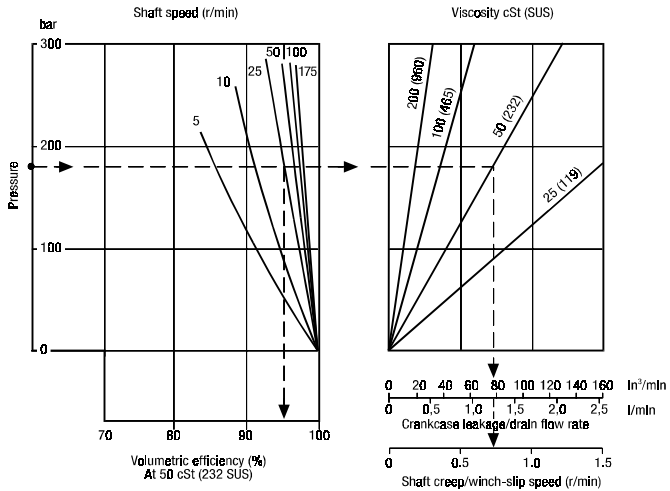


Model  
Staffa

Page  
23.70


Data Sheet  
M-1001/03.00

**Volumetric Efficiency (continued)**

**B270**

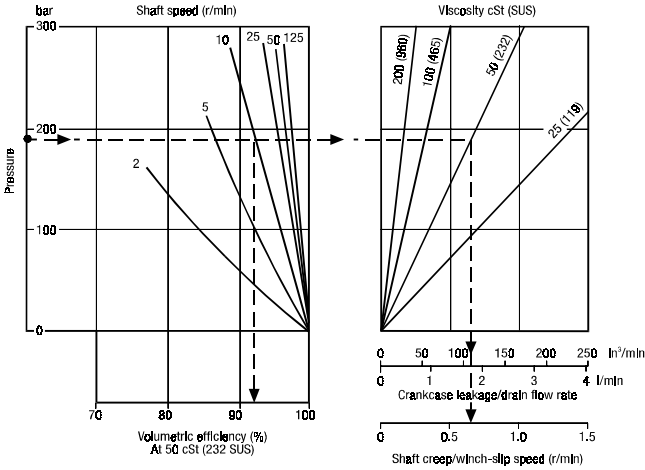

**B325**

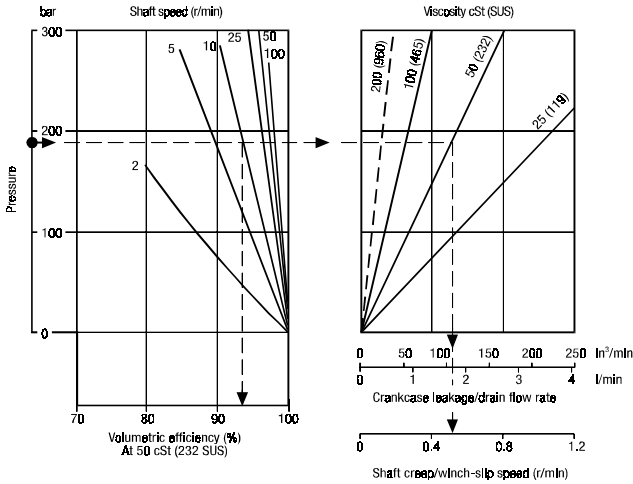

Model  
Staffa


Page  
24.70

Data Sheet  
M-1001/03.00




**Volumetric Efficiency (continued)**

**B400**

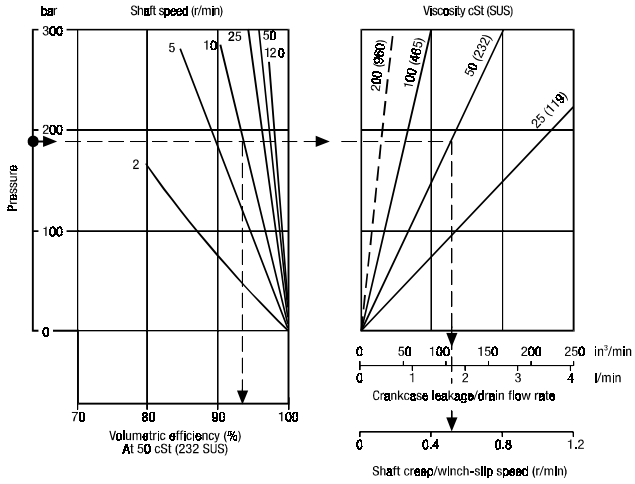

**B700**

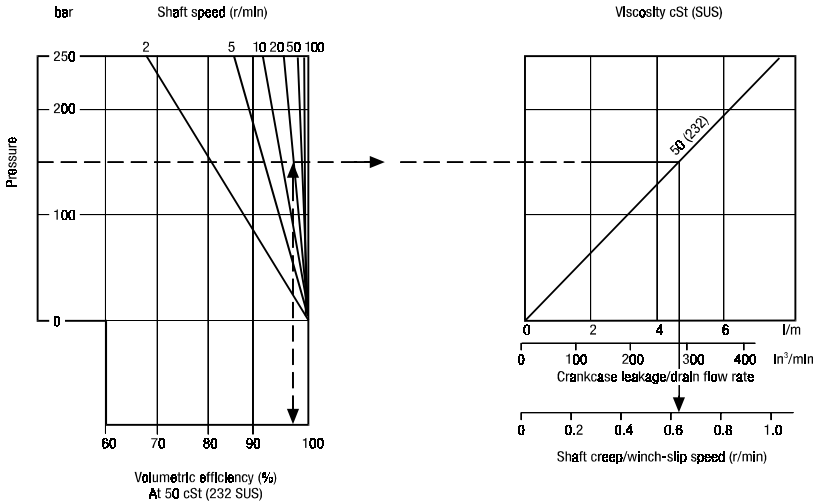

Model Staffa

Page 25.70

Data Sheet M-1001/03.00



**Circuit and Application Notes****Starting Torque**

The starting torques shown on the graphs on pages 9 to 12 are average and will vary with system parameters.

**Low Speed Operations**

Minimum operating speeds are determined by the hydraulic system and load conditions (load inertia, drive elasticity, etc.) Recommended minimum speeds are shown below:

Model Type	r/min
B010	20
B030	5
B045	6
B06080/100/125/150/200	3
B270/B325/HMB400	2
B700	1

Note: Speed as low as 0.025 rpm can be accurately achieved using electronic control systems. For operation at speeds below these figures please contact Kawasaki Precision Machinery (UK) Ltd.

**High Back Pressure**

When both inlet and outlet ports are pressurised continuously, the lower port pressure must not exceed 70 bar at any time.

Note: High back pressure reduces the effective torque output of the motor.

**Boost Pressure**

When operating as a motor the outlet pressure should equal or exceed the crankcase pressure. If pumping occurs (i.e. overrunning loads) then a positive pressure, "P", is required at the motor ports. Calculate "P" (bar) from the operating formula

$$\text{Boost Formula } P = 1 + \frac{N^2 \times V^2}{K} + C$$

Where P is in Bar, N = motor speed (RPM), V = motor displacement (cc/rev.), C=Crankcase pressure (BAR) and K=a constant from the table below:

MOTOR	PORTING	CONSTANT
HMB010	Standard	$8 \times 10^8$
HMB030	Standard	$3.7 \times 10^9$
	SO3, F(M)3	$7.5 \times 10^9$
HMB045	Standard	$1.3 \times 10^{10}$
	SO3, F(M)3	$1.6 \times 10^{10}$
HMB060/080/100	F(M)2	$2.7 \times 10^9$
	F(M)3, S03	$1.8 \times 10^{10}$
	F(M)2	$4.2 \times 10^9$
HM(HD)B125/150/200	F(M)3, S03	$4.0 \times 10^{10}$
	F(M)4, S04	$8.0 \times 10^{10}$
	F(M)4, S04	$7.2 \times 10^{10}$
HMHDB400	Standard	$6.0 \times 10^{10}$
	S045	$7.2 \times 10^{10}$
HMB700	Standard	$1.3 \times 10^{11}$



Model  
Staffa

Page  
26.70

Data Sheet  
M-1001/03.00

**Circuit and Application Notes (continued)**

The flow rate of oil needed for the make-up system can be estimated from the crankcase leakage figure (see Volumetric Efficiency graphs pages 19 to 29) Allowances should be made for other system losses and also for "fair wear and tear" during the life of the motor, pump and system components.

**Cooling Flow**

Operating within the continuous rating does not require any additional cooling.

For operating conditions above "continuous", up to the "intermittent" rating, additional cooling oil may be required.

This can be introduced through the spare crankcase drain holes, or in special cases through the valve spool end cap. Consult Kawasaki about such applications.

**Motor Casing Pressure**

With the standard shaft seal fitted, the motor casing pressure should not exceed 3.5 bar.

Notes:

1. The casing pressure at all times must not exceed either the motor inlet or outlet pressure.
2. High pressure shaft seals are available for casing pressures of:
  - 6 Bar for HMB700
  - 9 Bar for HMB 010
  - 10 Bar for all remaining frame sizes.
3. Check installation dimensions for maximum crankcase drain fitting depth.

**Hydraulic Fluids**

Dependent on motor (see Ordering Code.) suitable fluids include:

- (a) Antiwear hydraulic oils.
- (b) Phosphate ester (HFD fluids )
- (c) Water glycols ( HFC fluids)
- (d) 60/40% water-in-oil emulsions ( HFB fluids).
- (e) 5/95% oil-in-water emulsions (HFA fluids)

Reduce pressure and speed limits, see page 6.

Viscosity limits when using any fluid except oil-in-water (5/95) emulsions are;

Max. off load	2000cSt (9270 SUS)
Max. on load	150 cSt (695 SUS)
Optimum	50 cSt (232 SUS)
Minimum	25cSt (119 SUS)



Model Staffa	Page 27.70	Data Sheet M-1001/03.00
-----------------	---------------	----------------------------

**Circuit and Application Notes (continued)****Mineral Oil recommendations**

The fluid should be a good hydraulic grade, non-detergent Mineral Oil. It should contain anti-oxidant, anti-foam and demulsifying additives. It should contain antiwear or EP additives. Automatic transmission fluids and motor oils are not recommended.

**Temperature limits**

Ambient min.	-30°C (-22°F)
Ambient max.	+ 70°C (158°F)
Max. operating temperature range.	
Mineral Oil	Water- containing
Min -20°C (-4°F)	+10°C (50°F)
Max. + 80°C (175°F)	+54°C (130°F)

Note: To obtain optimum services life from both fluid and hydraulic systems components, a fluid operating temperature of 40°C is recommended.

**Filtration**

Full flow filtration ( open circuit ), or full boost flow filtration ( close circuit ) to ensure system cleanliness to ISO4406/1986 code 18/14 or cleaner.

**Noise levels**

The airborne noise level is less than 66.7 dB(A) DIN (&) dB (A) NFPA through the "continuous" operating envelope. Where noise is a critical factor, installation resonances can be reduced by isolating the motor by elastomeric means from the structure and the return line installation. Potential return line resonances originating from liquid borne noise can be further attenuated by providing a return line back pressure of 2 to 5 bar.

**Polar Moment of Inertia & Mass:**

Model Type	Polar moment of Inertia (kg.m <sup>2</sup> ) (Typical data)	Mass (kg) (Approx. all models)
HMB010	0.0076	40
HMB030	0.015	73
HMB045	0.047	120
HMB060	0.055	144
HMB080	0.060	144
HMB100	0.076	144
HMB125	0.22	217
HMB150	0.25	265
HMB200	0.27	265
HMB270	0.91	420
HMB325	0.95	429
HHHDB400 (With 4" valve)	0.54	481
HHHDB400 (With 4.5" valve)	0.54	510
HMB700	2.38	1050



Model  
Staffa

Page  
28.70

Data Sheet  
M-1001/03.00

**Crankcase Drain****Motor axis horizontal.**

The crankcase drain must be taken from a position above the horizontal centre line of the motor to ensure lubrication of the shaft bearing

**Axis vertical, shaft down.**

Use either drain position. The drain line should be run above the level of the uppermost bearing. If there is a risk of syphoning then a syphon breaker should be fitted.

**Axis vertical, shaft up.**

An additional G  $\frac{1}{4}$ " (BSPF) drain port is provided when "V" (shaft vertically upwards) designator is given after the shaft type (see Ordering Code). This additional drain should be connected into the main motor casing drain line downstream of a 0.35 bar check valve to ensure lubrication of the upper bearing, see diagram.



## Installation Data

**GENERAL****Spigot:**

The motor should be located by the mounting spigot on a flat, robust surface using correctly sized bolts. The diametrical clearance between the motor spigot and the mounting must not exceed 0.15mm. If the application incurs shock loading, frequent reversing or high speed running, then high tensile bolts should be used, including one fitted bolt.

**Bolt Torque:**

The recommended torque wrench setting for bolts are as follows:

<b>M12</b>	97 +/- 7Nm
<b>M14</b>	160 +/- 21Nm
<b>M18</b>	312 +/- 14Nm
<b>M20</b>	407 +/- 14Nm
<b>M24</b>	690 +/- 27Nm
<b><math>\frac{1}{2}</math>" UNF</b>	97 +/- 7Nm
<b><math>\frac{5}{8}</math>"</b>	265 +/- 14 Nm
<b><math>\frac{3}{4}</math>" bolts</b>	393 +/- 14 Nm
<b>1"</b>	810 +/- 27Nm

**Shaft Coupling:**

Where the motor is solidly coupled to a shaft having independent bearings the shaft must be aligned to within 0.13mm TIR

Model  
Staffa

Page  
29.70


Data Sheet  
M-1001/03.00




**Kawasaki**  
Hydraulic Products

**Installation Drawings HMB010 Motor**

(See additional views for shaft types)

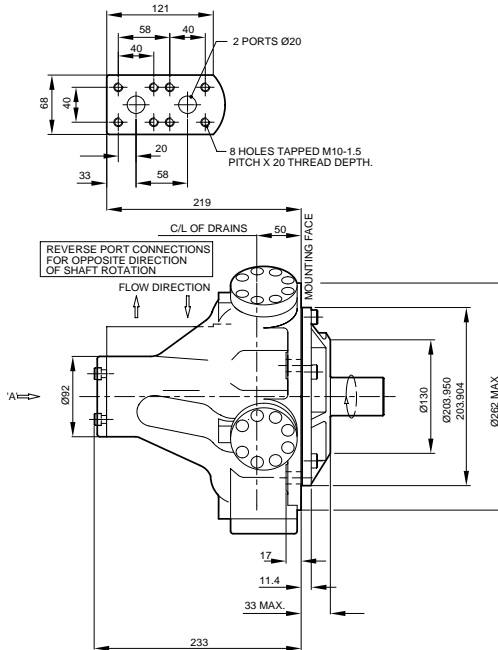

3/8-BSP DRAIN (CHOICE OF 3 POSITIONS)  
(2 NORMALLY PLUGGED)  
NOTE:  
ENSURE ON INSTALLATION DRAIN IS  
TAKEN FROM ABOVE MOTOR &  
DO NOT EXCEED 12 DEPTH OF  
COUPLING INTO DRAIN PORT




Model  
Staffa

Page  
30.70

Data Sheet  
M-1001/03.00

**Shaft Specification HMB010**


SHAFT TYPE 'S'  
13 SPLINES TO BS 3550-

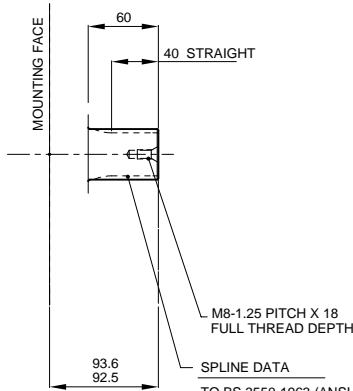

TO BS 3550-1963 (ANSI B92.1,1970 CLASS 5)  
FLAT ROOT SIDE FIT, CLASS 1  
PRESSURE ANGLE 30°  
NUMBER OF TEETH 13  
PITCH 8/16  
MAJOR DIAMETER 43.71/43.59  
FORM DIAMETER 38.136  
MINOR DIAMETER 37.36/36.91  
PIN DIAMETER 6.096  
DIAMETER OVER PINS 50.104/50.152

**SHAFT TYPE 'P'**  
CYLINDRICAL SHAFT WITH KEY

KEY (SUPPLIED):  
10.030/10.015 WIDE  
8.000/7.964 THICK



Model  
Staffa



Page  
31.70

Data Sheet  
M-1001/03.00

**Installation Drawings**

**HMB030 motor with rear entry ports (Mono block)**

See additional views for side entry model and for shaft types

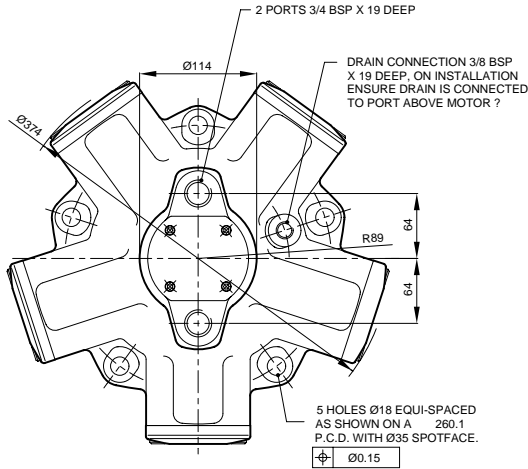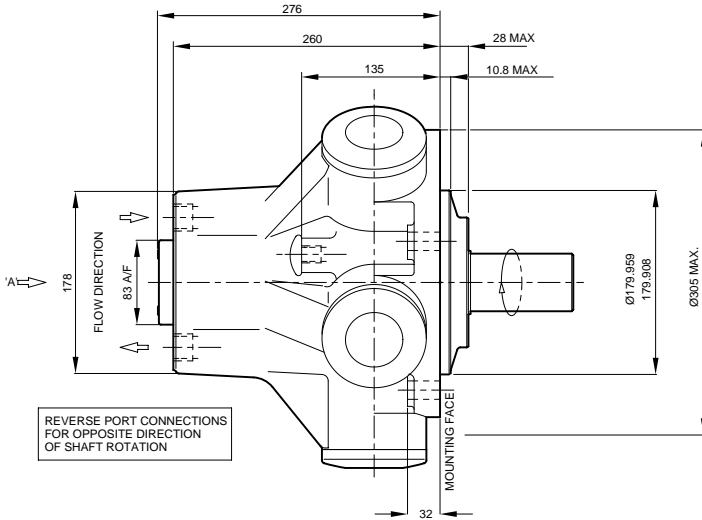

VIEW ON ARROW 'A'



Model  
Staffa

Page  
32.70


Data Sheet  
M-1001/03.00



**HMB030 Motor**

**HMB030 motor with side entry ports (Mono block)**

See view of rear entry motor for additional shaft types.

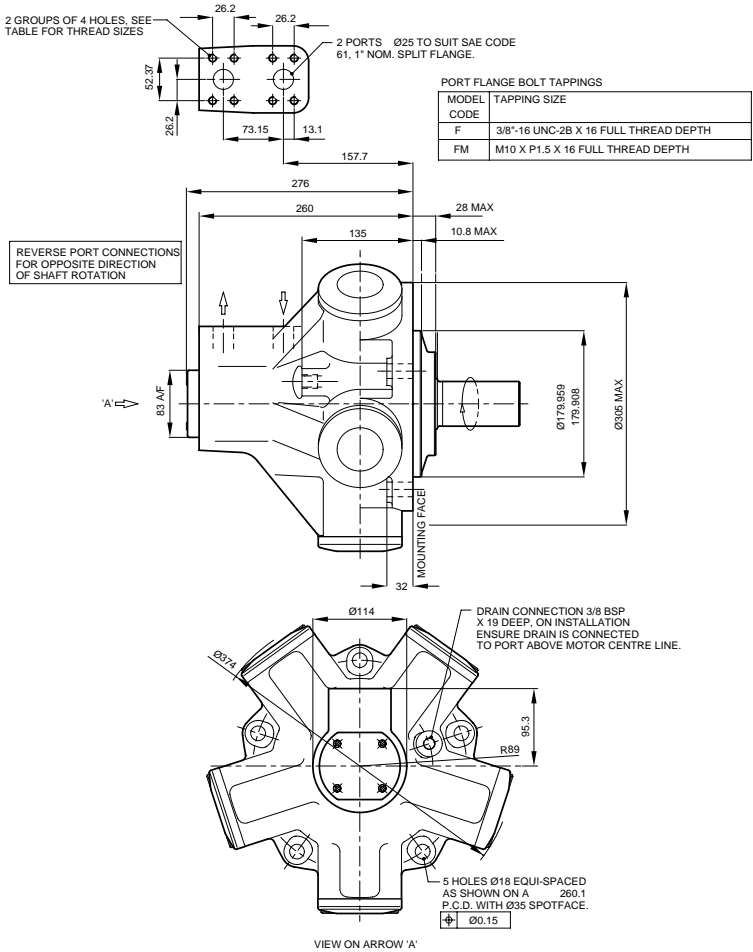

Model Staffa
-----------------

Page 33.70
---------------

Data Sheet M-1001/03.00
----------------------------




**Installation Drawing**

**HMB030 with F3/FM3 Main Port Connections**

PORT FLANGE BOLT TAPPINGS

MODEL CODE	TAPPING SIZE	GAUGE CONNECTIONS
F3	7/16"-14 UNC-2B X 27 FULL THREAD DEPTH	19/16"-18 UNF-2B, SAE J475
FM3	M12 X P1.75 X 27 FULL THREAD DEPTH	G1/4" (BSPF)

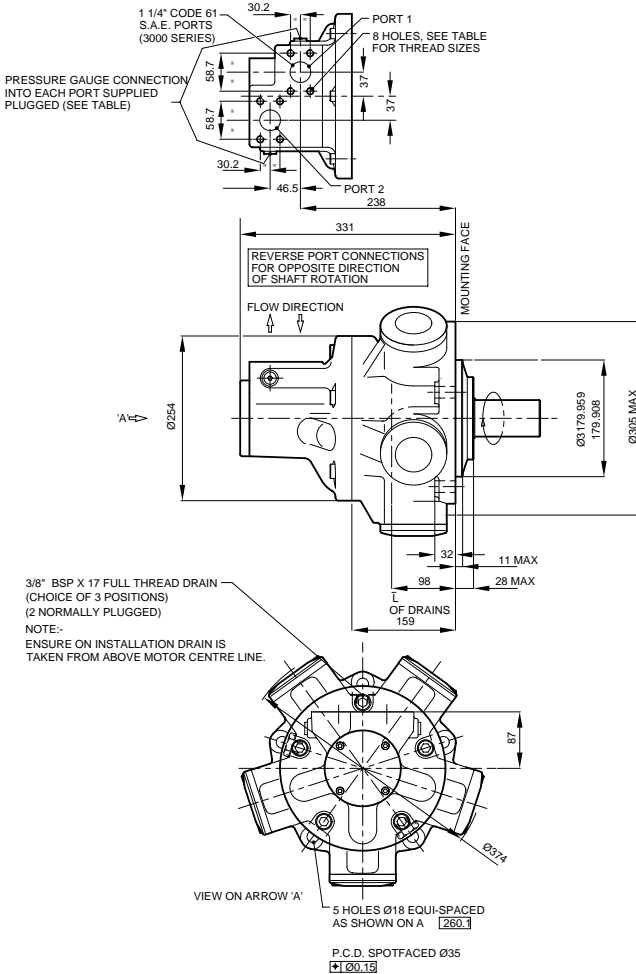

Model Staffa

Page 34.70

Data Sheet M-1001/03.00

**HMB30 Shaft Specification**

**Shaft Type "P"** Parallel keyed shaft


**Shaft Type "S"** Involute spline, 17 teeth to BS3550

**Shaft Type "Z"** Involute spline, 17 teeth to DIN 5480

**SHAFT TYPE 'S'**  
17 SPLINES TO BS 3550-1963

**SHAFT TYPE 'Z'**  
17 SPLINES TO DIN 5480

FOR SHAFT TYPE 'Z'  
DIN 5480, W55 X 3 X 17 X 7h




**SPLINE DATA**

FOR SHAFT TYPE 'S'  
TO BS 3550-1963 (ANSI B92.1, 1970 CLASS 5)  
FLAT ROOT SIDE FIT, CLASS 1

PRESSURE ANGLE	30°
NUMBER OF TEETH	17
PITCH	8/16
MAJOR DIAMETER	56.41/56.28
FORM DIAMETER	50.703
MINOR DIAMETER	50.07/49.60
PIN DIAMETER	6.096
DIAMETER OVER PINS	62.985/62.931

**SHAFT TYPE 'P'**  
CYLINDRICAL SHAFT WITH KEY

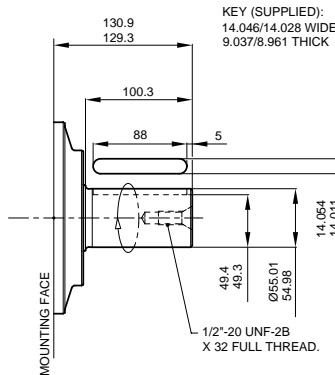

KEY (SUPPLIED):  
14.046/14.028 WIDE  
9.037/8.961 THICK




Model Staffa	Page 35.70	Data Sheet M-1001/03.00
--------------	------------	-------------------------


### Installation Drawings

**HMB045-\*\*-3\* Motor with rear entry ports**  
**HMB045-\*\*-D-3\* Motor with dual entry ports**

SEE VIEWS FOR ADDITIONAL SHAFT TYPES

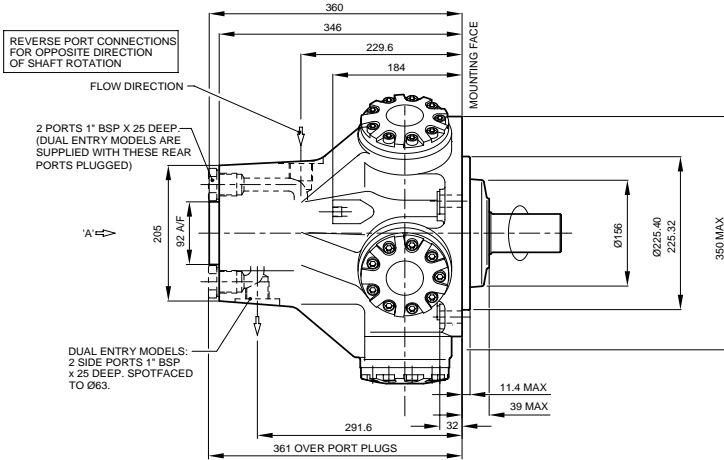

DRAIN CONNECTION 3/8 BSP x 19 DEEP SPOTFACED TO Ø28. CHOICE OF TWO POSITIONS, ONE NORMALLY PLUGGED. ON INSTALLATION ENSURE DRAIN IS CONNECTED TO PORT ABOVE MOTOR C/L

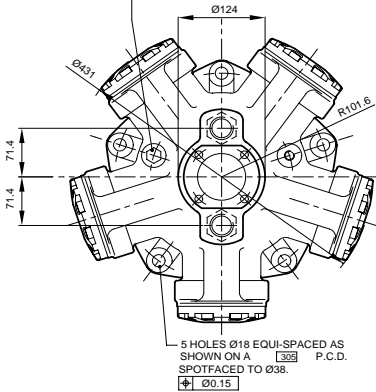

VIEW ON ARROW 'A'



Model  
Staffa

Page  
36.70


Data Sheet  
M-1001/03.00

**Installation Drawing**

**HMB045-FM3 Motor**


**PORT FLANGE BOLT TAPPINGS**

MODEL CODE	TAPPING SIZE	GAUGE CONNECTIONS
F3	7/16"-14 UNC-2B X 27 FULL THREAD DEPTH	9/16"-18 UNF-2B, SAE J475
FM3	M12 X P1.75 X 27 FULL THREAD DEPTH	G1/4 (BSPF)

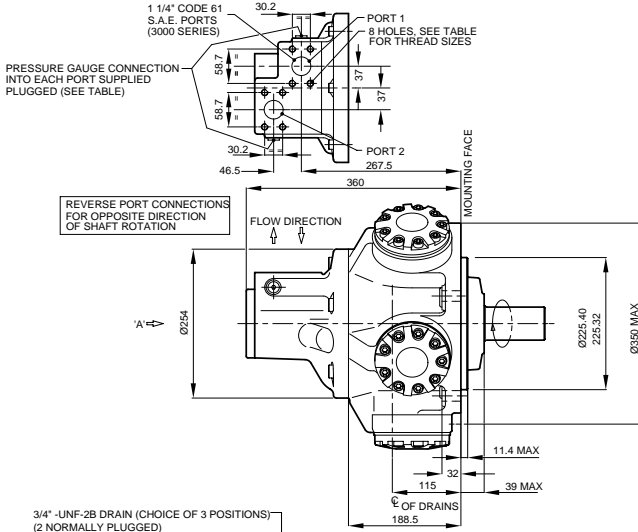

3/4" -UNF-2B DRAIN (CHOICE OF 3 POSITIONS) (2 NORMALLY PLUGGED)

NOTE:  
ENSURE ON INSTALLATION DRAIN IS TAKEN FROM ABOVE MOTOR C/L DO NOT EXCEED 12 DEPTH OF COUPLING INTO DRAIN PORT



5 HOLES Ø18 EQUI-SPACED AS SHOWN ON A 304.8 P.C.D. SPOTFACED Ø38

⊕ Ø0.15

VIEW ON ARROW 'A'

Model Staffa	Page 37.70	Data Sheet M-1001/03.00
--------------	------------	-------------------------



**B045 Shaft Specification**

**Shaft type "P"**, Parallel keyed shaft


**Shaft type "S"**, Involute spline, 17 teeth to BS3550

**Shaft type "Z"**, Involute spline to DIN 5480

**Shaft type "Q"**, Internal Involute spline, 21 teeth to BS 3550


**B045 SHAFT VARIATIONS**

**SHAFT TYPE 'P'**  
CYLINDRICAL SHAFT WITH KEY

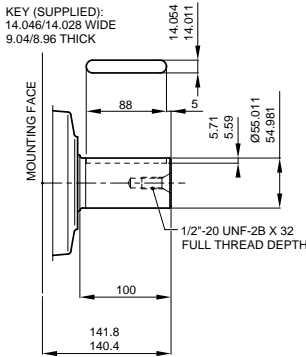

**SHAFT TYPES 'S'**  
17 SPLINES TO BS 3550-1963


**SHAFT TYPES 'Z'**  
17 SPLINES TO DIN 5480



**SPLINE DATA**

FOR SHAFT TYPE 'S'  
TO BS 3550-1963 & ANSI B92.1,1970  
FLAT ROOT SIDE FIT, CLASS 1  
PRESSURE ANGLE 30 °  
NUMBER OF TEETH 17  
PITCH 8/16  
MAJOR DIAMETER 56.41/56.28  
FORM DIAMETER 50.703  
MINOR DIAMETER 50.07/49.60  
PIN DIAMETER 6.096  
DIAMETER OVER PINS 62.985/62.931

**SHAFT TYPE 'Q'**  
FEMALE SHAFT WITH 21 SPLINES TO BS 3550



**SPLINE DATA**

INTERNAL SPLINE TO BS 3550-1963  
FLAT ROOT SIDE FIT  
PRESSURE ANGLE 30 °  
NUMBER OF TEETH 21  
PITCH 12/24  
MAJOR DIAMETER 46.566/46.896  
FORM DIAMETER 46.144  
MINOR DIAMETER 42.334/42.461  
PIN DIAMETER 3.658  
PIN FLATTED TO 3.556  
DIMENSION BETWEEN PINS 39.169/39.103

FOR SHAFT TYPE 'Z'  
DIN 5480, W55 X 3 X 17 X 7h




Model  
Staffa

Page  
38.70

Data Sheet  
M-1001/03.00

**HMB030/HMB045 Valve Housings**

**3" VALVE HOUSING WITH 6-BOLT FLANGE, 'S03'  
SUPPLIED WITH 2 'O' RING SEALS**

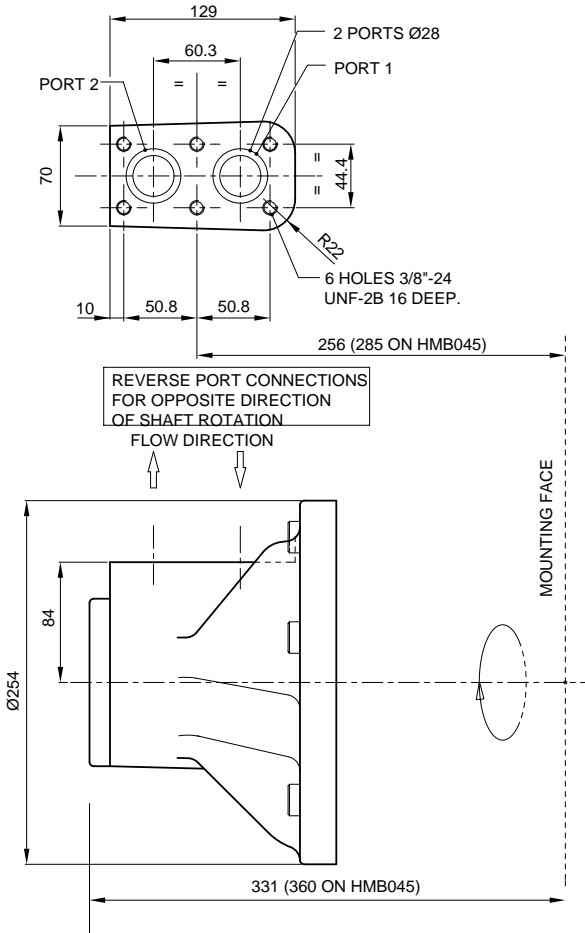

Model Staffa
--------------

Page 39.70
------------

Data Sheet M-1001/03.00
-------------------------



**HMB030/HMB045 Valve Housings (continued)**


**1" SAE 4-BOLT FLANGE, 'F2'/'FM2'**

Ø1" CODE 61 SAE PORTS  
(2 POSITIONS)

4 HOLES (2 POSITIONS) SEE  
TABLE FOR BOLT TAPPINGS

**PORT FLANGE BOLT TAPPINGS**

MODEL CODE	TAPPING SIZE
F2	3/8"-16 UNC-2B X 22 FULL THREAD DEPTH
FM2	M10 X P1.5 X 22 FULL THREAD DEPTH

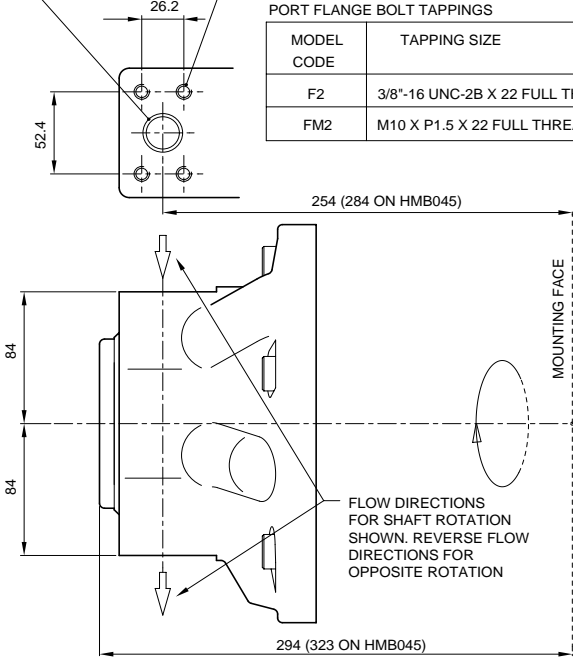

Model  
Staffa

Page  
40.70

Data Sheet  
M-1001/03.00




**Installation Drawings**

**HMB060/80 motors with type "F3"/"FM3" (1<sup>1</sup>/<sub>4</sub>" SAE) port connection**

See additional views for shaft types and for types "S03" and "S04" port connection.  
See drawing of dual-mount model for details of types "F2" and FM2" port connection.

PORT FLANGE BOLT TAPPINGS

MODEL CODE	TAPPING SIZE	GAUGE CONNECTIONS
F3	7/16"-14 UNC-2B X 27 FULL THREAD DEPTH	9/16"-18 UNF-2B, SAE J475
FM3	M12 X P1.75 X 27 FULL THREAD DEPTH	G1/4" (BSPF)

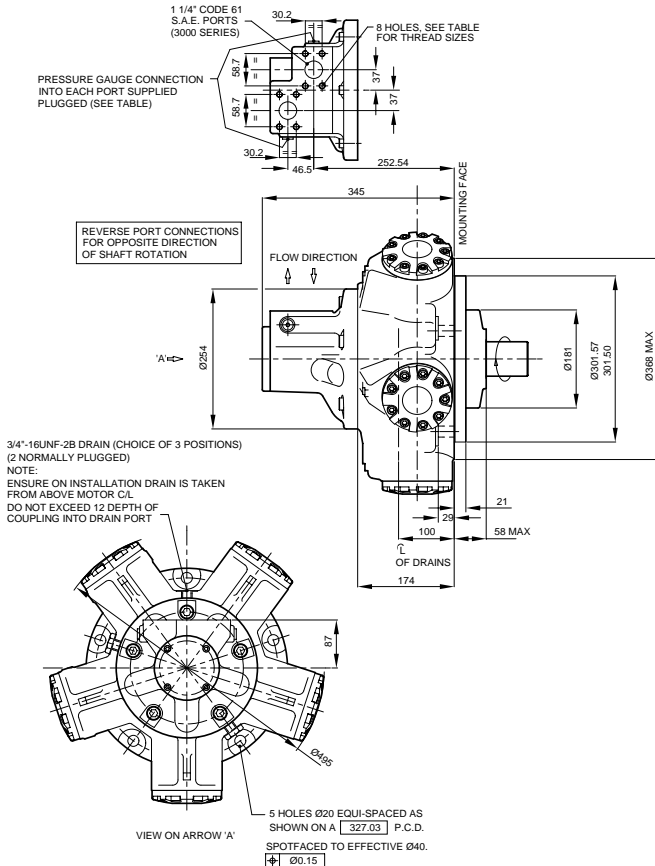


Model Staffa	Page 41.70	Data Sheet M-1001/03.00
--------------	------------	-------------------------




### HMB060/080/100 Shaft Specification


SHAFT TYPES 'P' & 'HP'  
CYLINDRICAL SHAFT WITH KEY

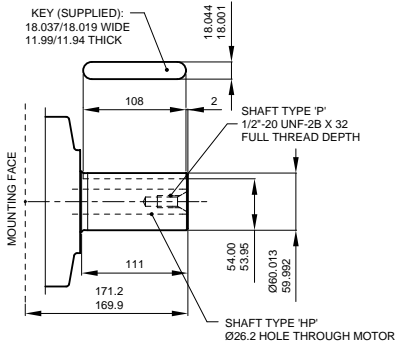

SHAFT TYPE 'X'  
SHORT TAPER WITH KEY

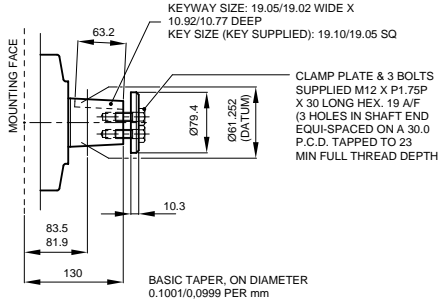

SHAFT TYPE 'T'  
LONG TAPER WITH KEY

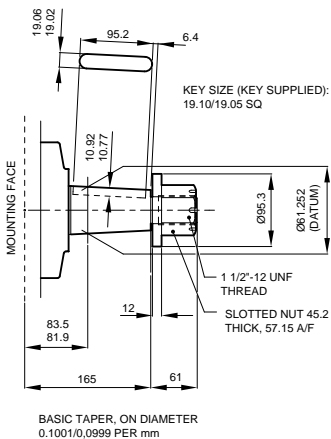

Model  
Staffa


Page  
42.70

Data Sheet  
M-1001/03.00

**HMB060/080/100 Shaft Specification (continued)**

**SHAFT TYPES 'S' & 'HS'**  
14 SPLINES TO BS 3550-1963

**SHAFT TYPES 'Z' & 'HZ'**  
22 SPLINES TO DIN 5480

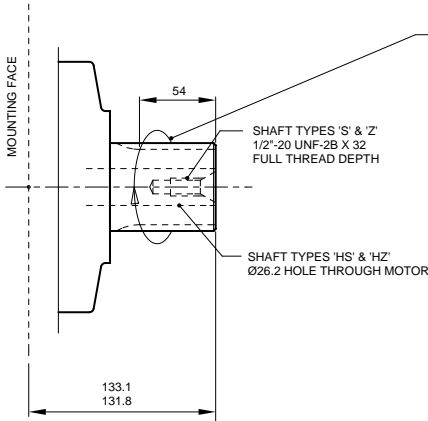


**SPLINE DATA**

FOR SHAFT TYPES 'S' & 'HS'  
TO BS 3550/ANSI B92.1 1970 CLASS 5  
FLAT ROOT SIDE FIT, CLASS 1  
PRESSURE ANGLE 30°  
NUMBER OF TEETH 14  
PITCH 6/12  
MAJOR DIAMETER 62.553/62.425  
FORM DIAMETER 55.052  
MINOR DIAMETER 54.084/53.525  
PIN DIAMETER 8.128  
DIAMETER OVER PINS 71.593/71.544

FOR SHAFT TYPES 'Z' & 'HZ'  
DIN 5480 W70 X 3 X 30 X 22 X 7h

**SHAFT TYPE 'Q' & 'HQ'**  
FEMALE SHAFT WITH 24 SPLINES TO BS 3550

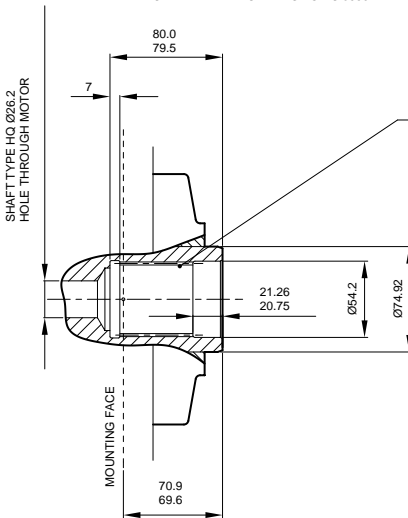

**SPLINE DATA**

TO BS 3550  
FLAT ROOT SIDE FIT, MODIFIED  
PRESSURE ANGLE 30°  
NUMBER OF TEETH 24  
PITCH 12/24  
MAJOR DIAMETER 53.246/52.916  
MINOR DIAMETER 48.811/48.684  
PIN DIAMETER 3.658  
PIN FLATTED TO 3.560  
DIAMETER BETWEEN PINS 45.626/45.550

Model  
Staffa

Page  
43.70

Data Sheet  
M-1001/03.00




### Installation Drawings HMB125 Motor with type "F3"/FM3 (1 1/4" SAE) Port Connection

SEE VIEWS FOR SHAFT TYPES & 'F2', 'FM2', 'S03', 'S04', 'F4' & 'FM4' PORT CONNECTION.

PORT FLANGE BOLT TAPPINGS

MODEL CODE	TAPPING SIZE	GAUGE CONNECTIONS
F3	7/16"-14 UNC-2B X 27 FULL THREAD DEPTH	9/16"-18 UNF-2B, SAE J475
FM3	M12 X P1.75 X 27 FULL THREAD DEPTH	G1/4" (BSPF)

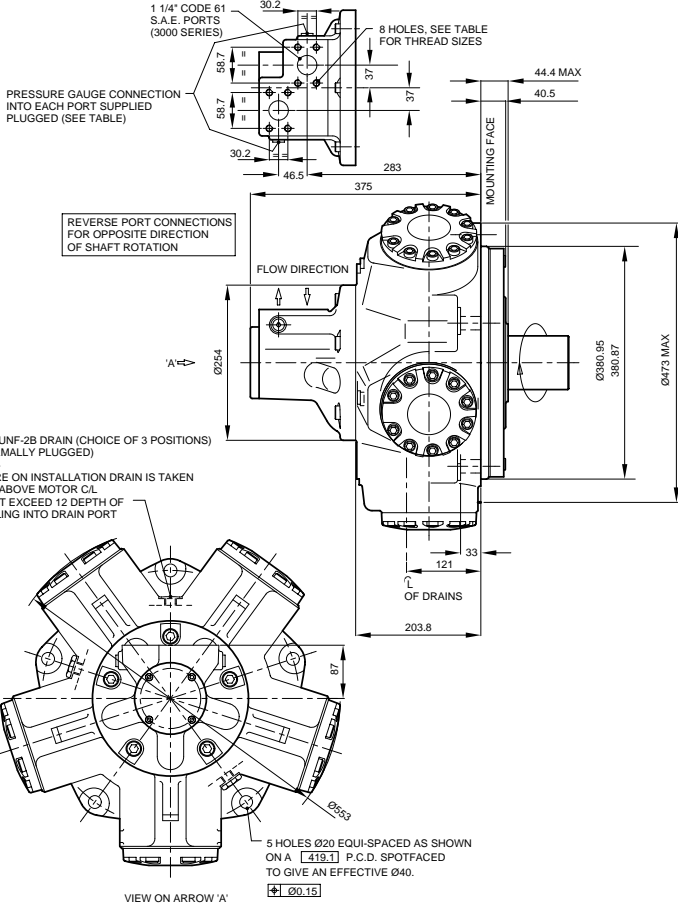

Model Staffa

Page 44.70


Data Sheet M-1001/03.00

**Installation Drawings**  
**HDB125 Motor with type "F3"/FM3 (1<sup>1</sup>/<sub>4</sub>" SAE) Port Connection**

SEE VIEWS FOR SHAFT TYPES & 'F2', 'FM2', 'S03', 'S04', 'F4' & 'FM4' PORT CONNECTION.

PORT FLANGE BOLT TAPPINGS

MODEL CODE	TAPPING SIZE	GAUGE CONNECTIONS
F3	7/16"-14 UNC-2B X 27 FULL THREAD DEPTH	9/16"-18 UNF-2B, SAE J475
FM3	M12 X P1.75 X 27 FULL THREAD DEPTH	G1/4" (BSPF)

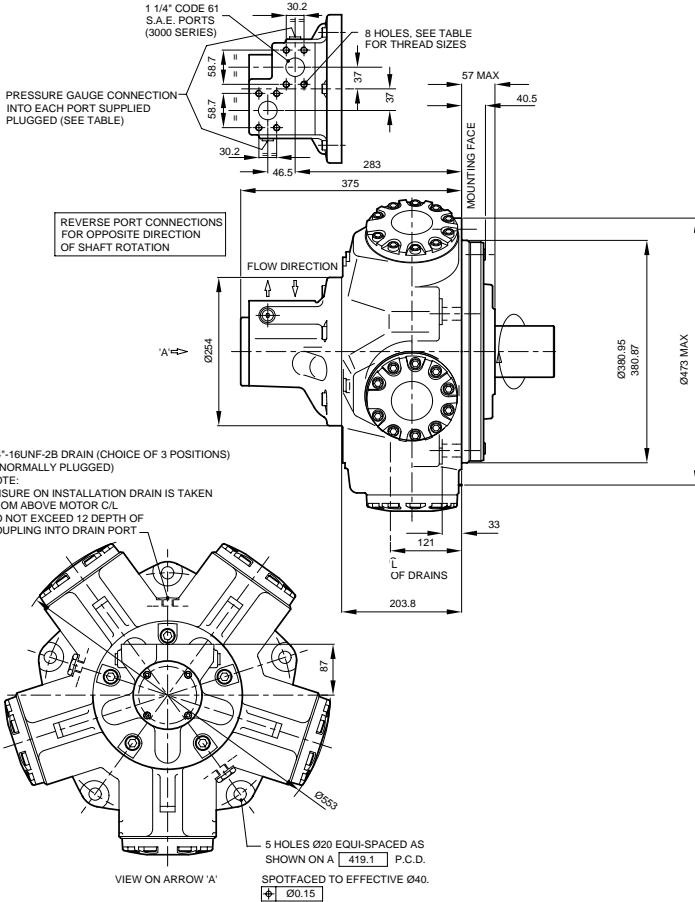


Model  
Staffa

Page  
45.70


Data Sheet  
M-1001/03.00




**Motor HMB125 Shaft Specification**

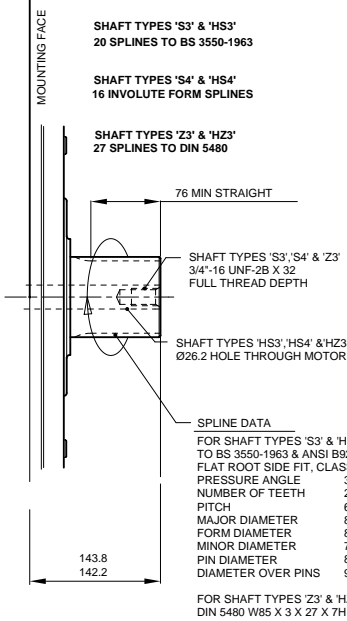

**SHAFT TYPE 'T'**  
LONG TAPER WITH KEY

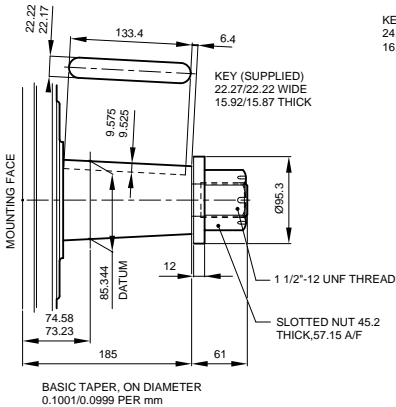

**SHAFT TYPES 'P1' & 'HP1'**  
CYLINDRICAL SHAFT WITH KEY

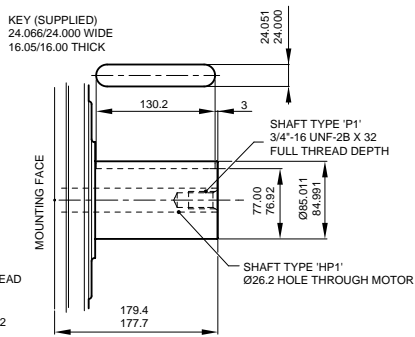


Model  
Staffa

Page  
46.70

Data Sheet  
M-1001/03.00

**Motor HDB125 Shaft Specification**


**SHAFT TYPES 'S5' & 'HS5'**  
23 SPLINES TO BS 3550-1963

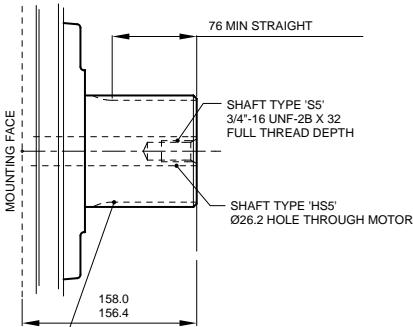

**SPLINE DATA**

FOR SHAFT TYPES 'S5' & 'HS5'  
TO BS 3550-1963 & ASA, B5.15-1960  
FLAT ROOT SIDE FIT, CLASS 1  
PRESSURE ANGLE 30°  
NUMBER OF TEETH 23  
PITCH 6/12  
MAJOR DIAMETER 100.652/100.526  
FORM DIAMETER 92.939  
MINOR DIAMETER 92.184/91.626  
PIN DIAMETER 8.128  
DIAMETER OVER PINS 109.573/109.517


**SHAFT TYPES 'S3' & 'HS3'**  
20 SPLINES TO BS 3550-1963

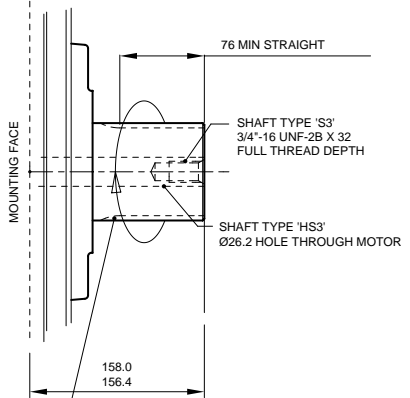

**SPLINE DATA**

FOR SHAFT TYPES 'S3' & 'HS3'  
TO BS 3550-1963 & ASA, B5.15-1960  
FLAT ROOT SIDE FIT, CLASS 1  
PRESSURE ANGLE 30°  
NUMBER OF TEETH 20  
PITCH 6/12  
MAJOR DIAMETER 87.953/87.825  
FORM DIAMETER 80.264  
MINOR DIAMETER 79.485/78.925  
PIN DIAMETER 8.128  
DIAMETER OVER PINS 97.084/97.030

**SHAFT TYPES 'Z5' & 'HZ5'**  
24 SPLINES TO DIN 5480

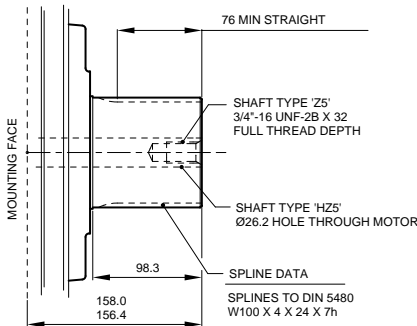

**SPLINE DATA**


SPLINES TO DIN 5480  
W100 X 4 X 24 X 7h




Model Staffa	Page 47.70	Data Sheet M-1001/03.00
--------------	------------	-------------------------

**Motor HDB125 Shaft Specification (continued)**

SHAFT TYPES 'P1' & 'HP1'  
CYLINDRICAL SHAFT WITH KEY

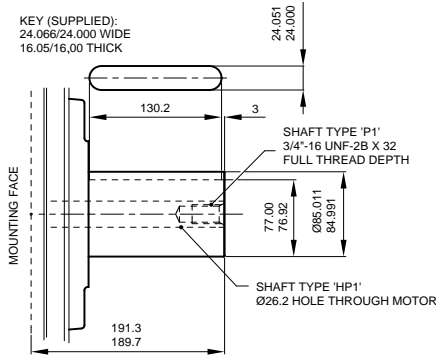


SHAFT TYPE 'Q' & 'HQ'  
FEMALE SHAFT WITH 34 SPLINES TO BS 3550

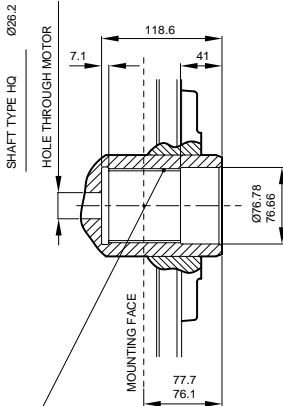

SPLINE DATA

TO BS 3550-1963 & ASA, B5.15-1960	
FLAT ROOT SIDE FIT,	30°
PRESSURE ANGLE	
NUMBER OF TEETH	34
PITCH	12/24
MAJOR DIAMETER	74.414/74.084
MINOR DIAMETER	69.977/69.850
PIN DIAMETER	3.658
PIN FLATTED TO	3.556
DIAMETER BETWEEN PINS	66.815/66.744

SHAFT TYPES 'P2' & 'HP2'  
CYLINDRICAL SHAFT WITH KEY

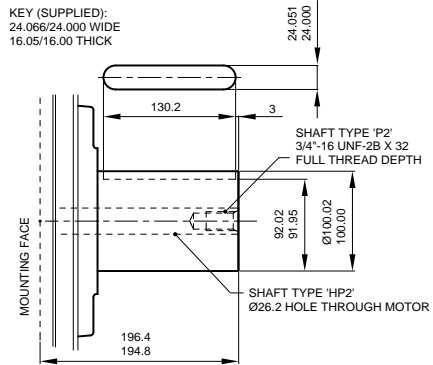

Model  
Staffa


Page  
48.70

Data Sheet  
M-1001/03.00




**Motor HDB125 Shaft Specification (continued)**

**SHAFT TYPE 'X' & 'HX'  
SHORT TAPER WITH KEY**

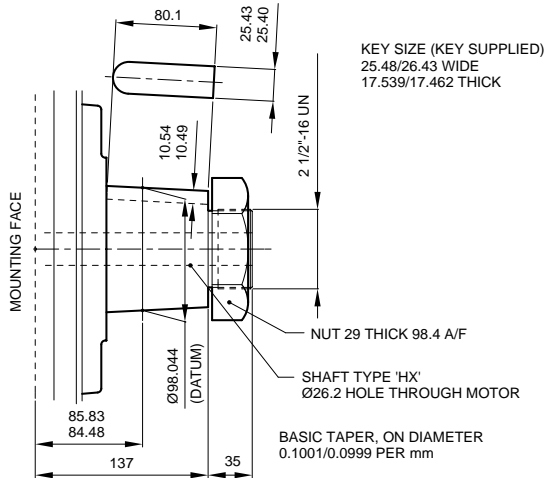

**SHAFT TYPE 'T'  
LONG TAPER WITH KEY**

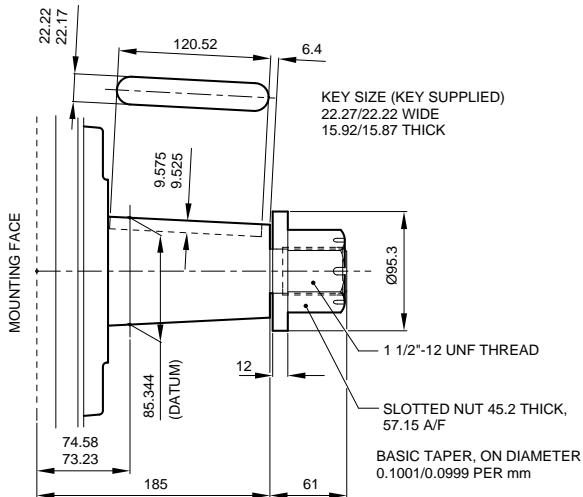


Model  
Staffa

Page  
49.70


Data Sheet  
M-1001/03.00

**Motor HMB125/HDB125 Valve Housings**

**3" VALVE HOUSING WITH 6-BOLT FLANGE, 'S03'  
SUPPLIED WITH 2 'O' RING SEALS**

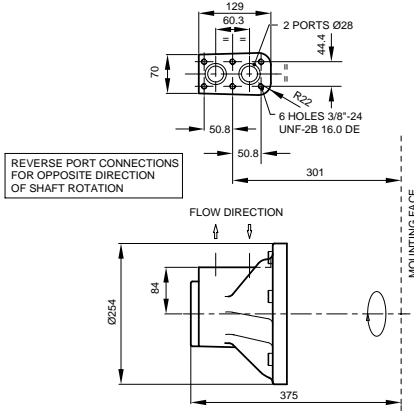

**4" VALVE HOUSING WITH 1 1/2" SAE 4-BOLT FLANGES, 'F4'/FM4'  
IN MODEL CODE POSITION □**

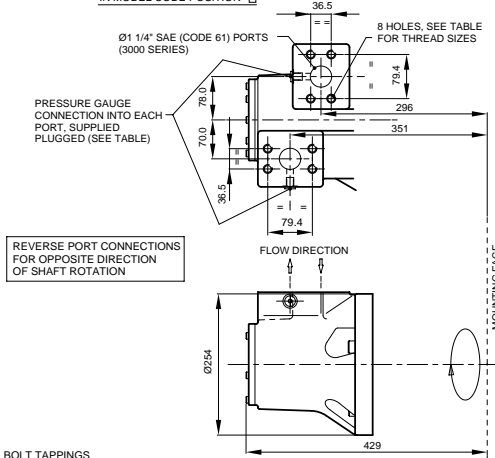


PORT FLANGE BOLT TAPPINGS

MODEL CODE	TAPPING SIZE	GAUGE CONNECTIONS
F4	5/8"-11 UNC-2B X 35 FULL THREAD DEPTH	9/16"-18 UNF-2B, SAE J475
FM4	M16 X P2 X 35 FULL THREAD DEPTH	G1/4" (BSPF)




**Motor HMB125/HDB125 Valve Housings (continued)**

**4" VALVE HOUSING WITH 6-BOLT FLANGE, 'S04'  
SUPPLIED WITH 2 'O' RING SEALS**

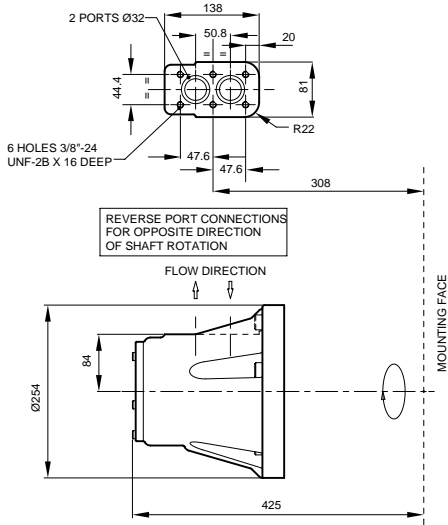

**2 1/4" VALVE HOUSING WITH 1" SAE 4-BOLT FLANGES, F2/FM2'**

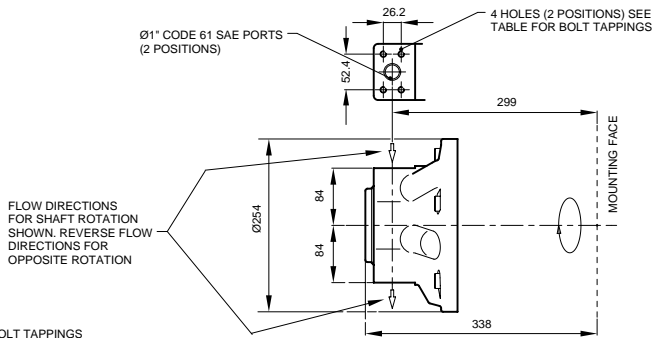

PORT FLANGE BOLT TAPPINGS

MODEL CODE	TAPPING SIZE
F2	3/8"-16 UNC-2B X 22 FULL THREAD DEPTH
FM2	M10 X P1.5 X 22 FULL THREAD DEPTH



Model  
Staffa

Page  
51.70

Data Sheet  
M-1001/03.00



## Installation Drawings

**HMB150/200 Motors with type "F4"/"FM4" (1<sup>1</sup>/<sub>2</sub>" SAE) port connection**

See additional views for shaft types and for types "S04", "F3", "FM3" and "S03" port connection

**PORT FLANGE BOLT TAPPINGS**

MODEL CODE	TAPPING SIZE	GAUGE CONNECTIONS
F4	5/8"-11 UNC-2B X 35 FULL THREAD DEPTH	9/16"-18 UNF-2B, SAE J475
FM4	M16 X P2.0 X 35 FULL THREAD DEPTH	G1/4" (BSPF)

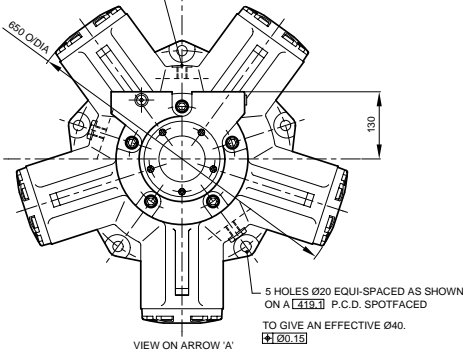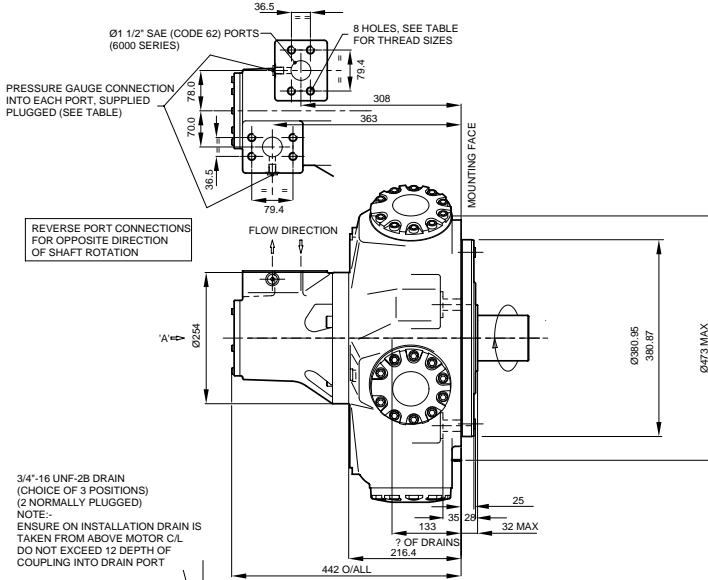

**Kawasaki**  
Hydraulic Products

Model  
StaffaPage  
52.70Data Sheet  
M-1001/03.00


**Installation Drawings**

**HMHDB 150/200 Motors with type "F4"/...(1 1/2" SAE) Port Connection**

SEE VIEWS FOR SHAFT TYPES & 'F2', 'FM2', 'F3', 'FM3', 'S03' & 'S04' PORT CONNECTION.

**PORT FLANGE BOLT TAPPINGS**

MODEL CODE	TAPPING SIZE	GAUGE CONNECTIONS
F4	5/8"-11 UNC-2B X 35 FULL THREAD DEPTH	9/16"-18 UNF-2B, SAE J475
FM4	M16 X P2.0 X 35 FULL THREAD DEPTH	G1/4" (BSPF)

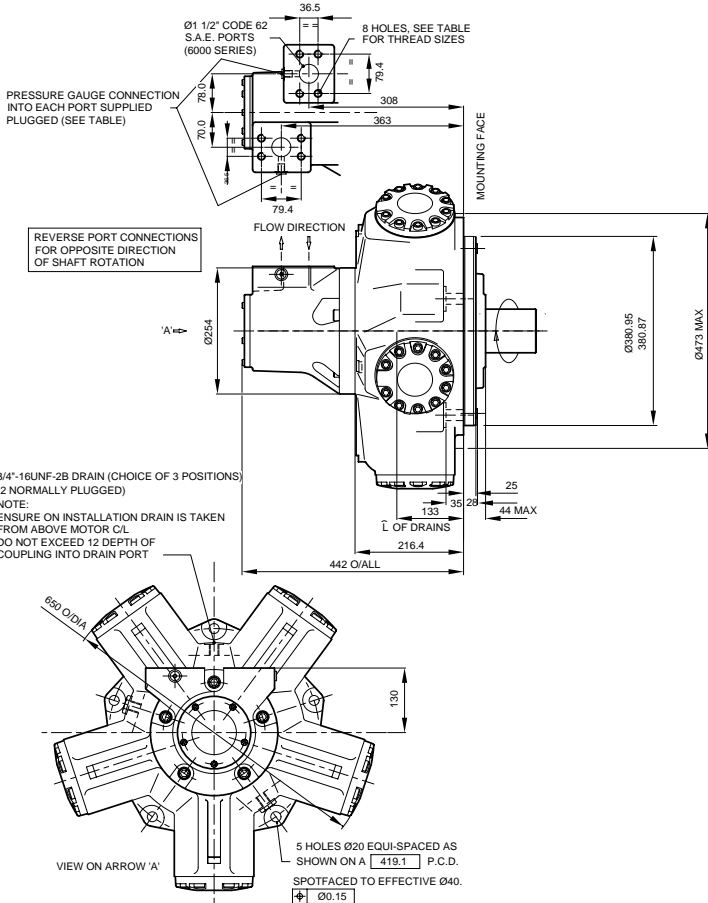




Model  
Staffa

Page  
53.70

Data Sheet  
M-1001/03.00



**HMB150 Shaft Specification**

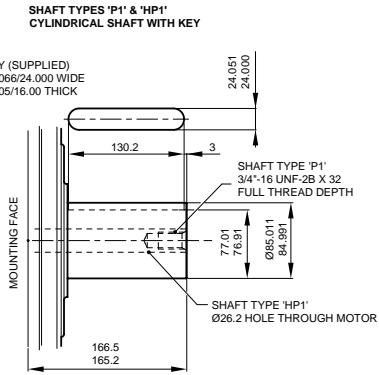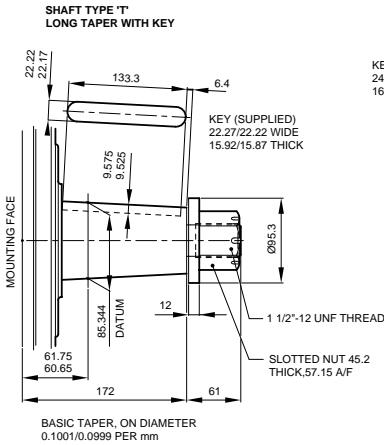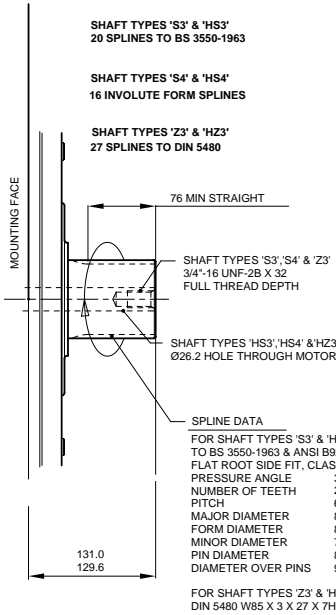


Model  
Staffa

Page  
54.70

Data Sheet  
M-1001/03.00

**HDB 150/200 Shaft Specifications**


**SHAFT TYPES 'S5' & 'HS5'**  
23 SPLINES TO BS 3550-1963

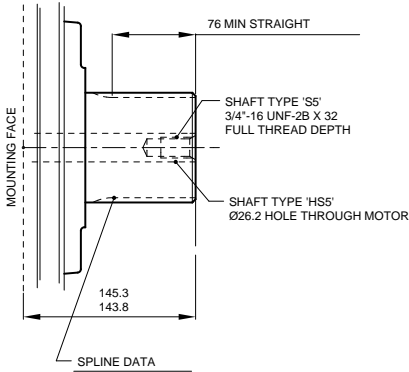

SPLINE DATA

FOR SHAFT TYPES 'S5' & 'HS5'  
TO BS 3550-1963 & ASA,B5.15-1960  
FLAT ROOT SIDE FIT, CLASS 1  
PRESSURE ANGLE 30°  
NUMBER OF TEETH 23  
PITCH 6/12  
MAJOR DIAMETER 100.652/100.526  
FORM DIAMETER 92.939  
MINOR DIAMETER 92.184/91.626  
PIN DIAMETER 8.128  
DIAMETER OVER PINS 109.573/109.517


**SHAFT TYPES 'S3' & 'HS3'**  
20 SPLINES TO BS 3550-1963

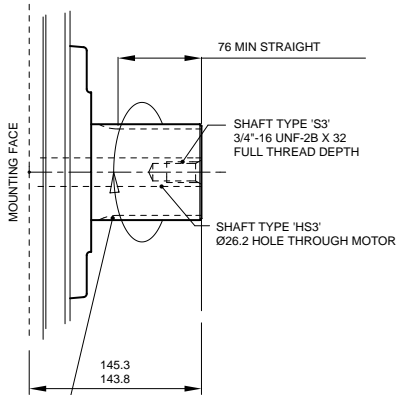

SPLINE DATA

FOR SHAFT TYPES 'S3' & 'HS3'  
TO BS 3550-1963 & ASA,B5.15-1960  
FLAT ROOT SIDE FIT, CLASS 1  
PRESSURE ANGLE 30°  
NUMBER OF TEETH 20  
PITCH 6/12  
MAJOR DIAMETER 87.953/87.825  
FORM DIAMETER 80.264  
MINOR DIAMETER 79.485/78.925  
PIN DIAMETER 8.128  
DIAMETER OVER PINS 97.084/97.030

**SHAFT TYPES 'Z5' & 'HZ5'**  
24 SPLINES TO DIN 5480

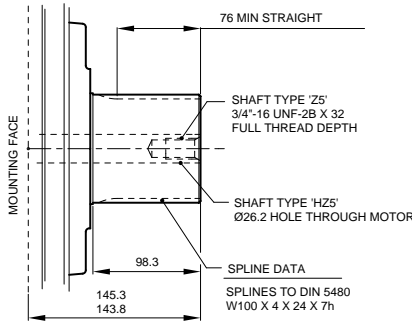

SPLINE DATA

SPLINES TO DIN 5480  
W100 X 4 X 24 X 7h




Model  
Staffa

Page  
55.70

Data Sheet  
M-1001/03.00


## HDB 150/200 Shaft Specifications (continued)

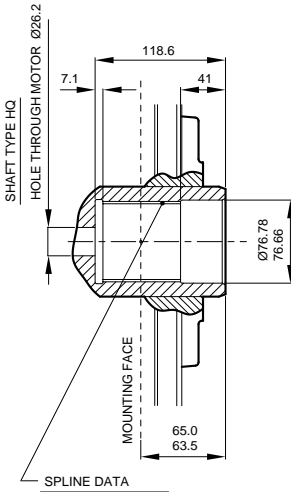SHAFT TYPE 'O' & 'HQ'  
FEMALE SHAFT WITH 34 SPLINES TO BS 3550

TO BS 3550-1963 & ASA, B5.15-1960  
 FLAT ROOT SIDE FIT,  
 PRESSURE ANGLE 30°  
 NUMBER OF TEETH 34  
 PITCH 12/24  
 MAJOR DIAMETER 74.414/74.084  
 MINOR DIAMETER 69.977/69.850  
 PIN DIAMETER 3.658  
 PIN FLATTED TO 3.556  
 DIAMETER BETWEEN PINS 66.815/66.744

SHAFT TYPES 'P2' & 'HP2'  
CYLINDRICAL SHAFT WITH KEY

KEY (SUPPLIED):  
 24.066/24.000 WIDE  
 16.05/16.00 THICK

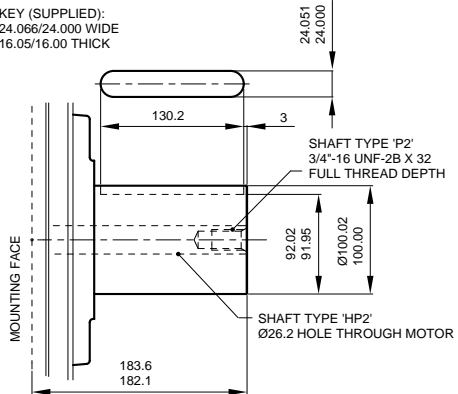

**Kawasaki**  
Hydraulic Products

Model  
Staffa


Page  
56.70

Data Sheet  
M-1001/03.00



HDB 150/200 Shaft Specifications (continued)

**SHAFT TYPE 'X' & 'HX'  
SHORT TAPER WITH KEY**

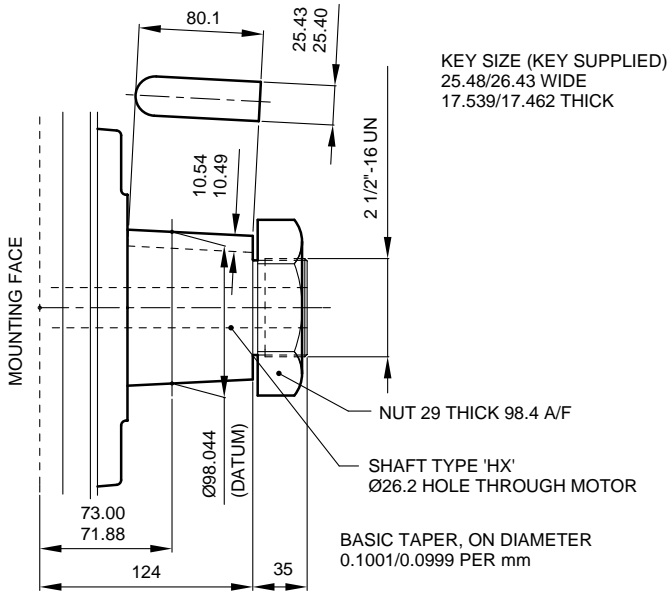

Model Staffa
--------------


Page 57.70
------------

Data Sheet M-1001/03.00
-------------------------




**HMB150/200 Valve Housings**  
**3" Valve Housing with 6-Bolt Flange, "S03"**

3" VALVE HOUSING WITH 6-BOLT FLANGE, "S03"  
 SUPPLIED WITH 2 1/2" RING SEALS

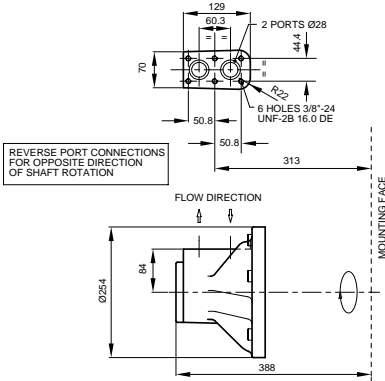

3" VALVE HOUSING WITH 1 1/4" SAE 4-BOLT FLANGES, 'F3'/FM3'  
 IN MODEL CODE POSITION [ ]

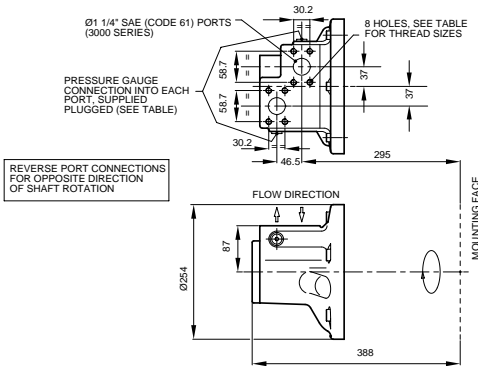

PORT FLANGE BOLT TAPPINGS


MODEL CODE	TAPPING SIZE	GAUGE CONNECTIONS
F3	7/16"-14 UNC-2B X 27 FULL THREAD DEPTH	9/16"-18 UNF-2B, SAE J475
FM3	M12 X R1.75 X 27 FULL THREAD DEPTH	G1/4" (BSPF)



**HMB150/HMB200 Valve Housings (continued)**

**4" Valve Housing with 6-Bolt Flange, "S04"**

4" VALVE HOUSING WITH 6-BOLT FLANGE, "S04"  
 SUPPLIED WITH 2 'O' RING SEALS

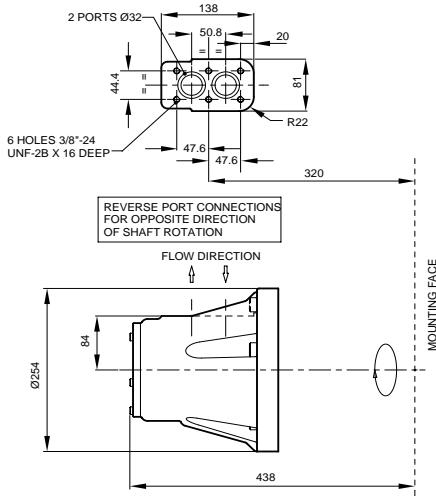


REVERSE PORT CONNECTIONS  
 FOR OPPOSITE DIRECTION  
 OF SHAFT ROTATION

FLOW DIRECTION

MOUNTING FACE

**2 1/4" Valve Housing with 1" SAE 4-Bolt Flanges, F2/FM2**

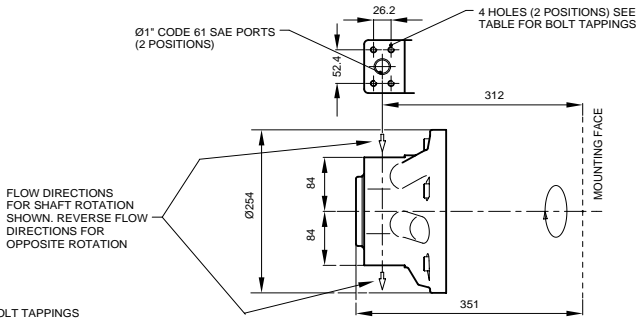

FLOW DIRECTIONS  
 FOR SHAFT ROTATION  
 SHOWN. REVERSE FLOW  
 DIRECTIONS FOR  
 OPPOSITE ROTATION

MOUNTING FACE

PORT FLANGE BOLT TAPPINGS

MODEL CODE	TAPPING SIZE
F2	3/8"-16 UNC-2B X 22 FULL THREAD DEPTH
FM2	M10 X P1.5 X 22 FULL THREAD DEPTH



Model  
Staffa



Page  
59.70

Data Sheet  
M-1001/03.00

**Installation Drawings**

**HMB270 Motor with Type F4/FM4 (1 1/2 SAE) Port Connection (HMHDB270 Dimensions in brackets)**

SEE ADDITIONAL VIEWS FOR SHAFT TYPES & 'SO4' PORT CONNECTION.

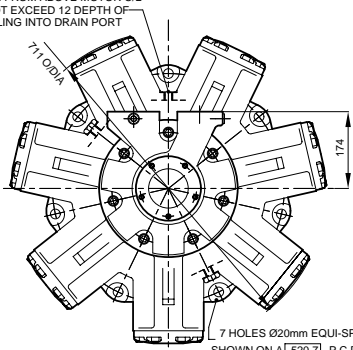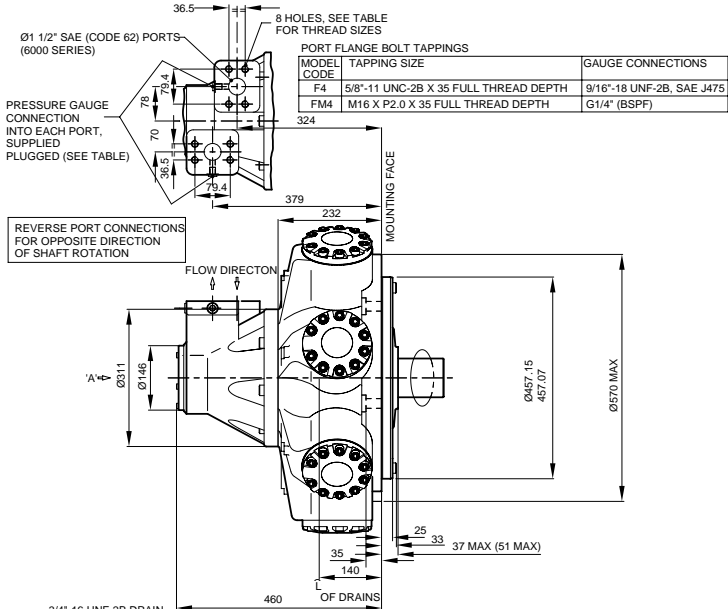

VIEW ON ARROW 'A'

Ⓜ0.15




Model Staffa

Page 60.70

Data Sheet M-1001/03.00

**Installation Drawings**

**HMDB 325 Motor with Type F4/FM4 (1 1/2" SAE) Port Connection HM325 (Dimensions in Brackets)**

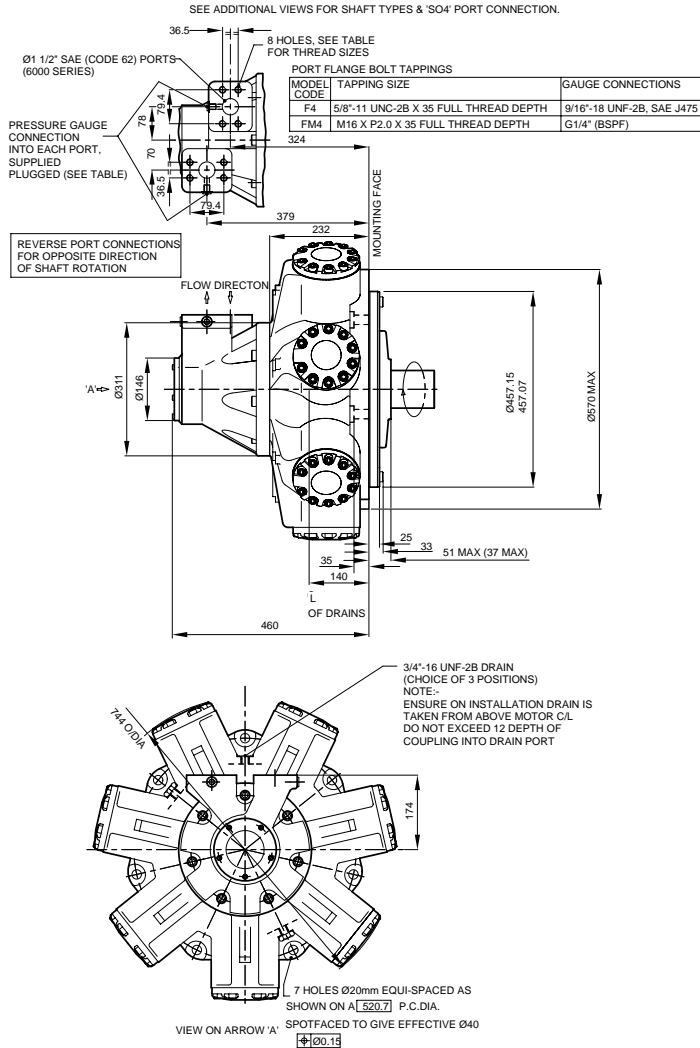

Model Staffa

Page 61.70


Data Sheet M-1001/03.00



**HMB270/325 Shaft Specification**

SHAFT TYPES 'S3' & 'HS3'  
20 SPLINES TO BS 3550-1963

SHAFT TYPES 'Z' & 'HZ'  
24 SPLINES TO DIN 5480

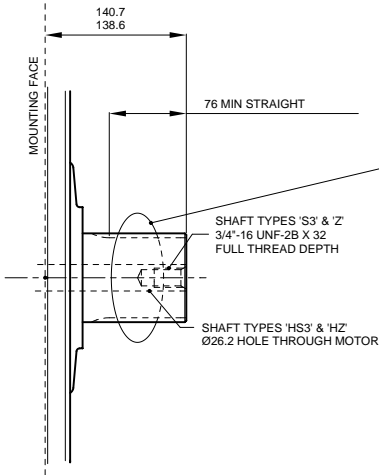


**SPLINE DATA**

FOR SHAFT TYPES 'S3' & 'HS3'  
TO BS 3550-1963 (ANSI B92.1,1970 CLASS 5)  
FLAT ROOT SIDE FIT, CLASS 1  
PRESSURE ANGLE 30 °  
NUMBER OF TEETH 20  
PITCH 6/12  
MAJOR DIAMETER 87.953/87.825  
FORM DIAMETER 80.264  
MINOR DIAMETER 79.485/78.925  
PIN DIAMETER 8.128  
DIAMETER OVER PINS 97.084/97.030

FOR SHAFT TYPES 'Z' & 'HZ'  
DIN 5480, W100 X 4 X 24 X 7h

SHAFT TYPE 'Q' & 'HQ'  
FEMALE SHAFT WITH 34 SPLINES TO BS 3550

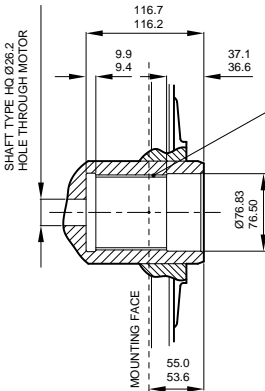

**SPLINE DATA**

TO BS 3550-1963  
FLAT ROOT SIDE FIT  
PRESSURE ANGLE 30 °  
NUMBER OF TEETH 34  
PITCH 12/24  
MAJOR DIAMETER 74.414/74.084  
MINOR DIAMETER 69.977/69.850  
PIN DIAMETER 3.658  
PIN FLATTED TO 3.556  
DIMENSION BETWEEN PINS 66.815/66.744



Model  
Staffa


Page  
62.70

Data Sheet  
M-1001/03.00

**HMB270/325 Shaft Specification (continued)**


**SHAFT TYPES 'P1' & 'HP1'**  
CYLINDRICAL SHAFT WITH KEY

KEY (SUPPLIED):  
24.066/24.000 WIDE  
16.05/166.00 THICK

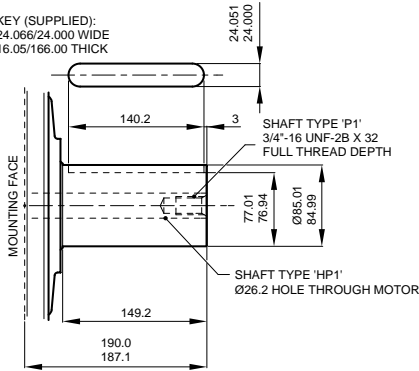

**SHAFT TYPE 'T'**  
LONG TAPER WITH KEY


KEY (SUPPLIED):  
25.48/25.40 WIDE  
17.539/17.463 THICK

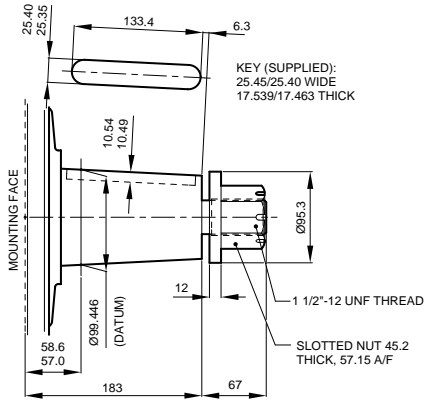

BASIC TAPER, ON DIAMETER  
0.1001/0.0999 PER mm

**SHAFT TYPE 'X'**  
SHORT TAPER WITH 2 KEYS

KEY SIZE (2 KEYS SUPPLIED):  
25.48/25.43 WIDE  
17.539/17.462 THICK

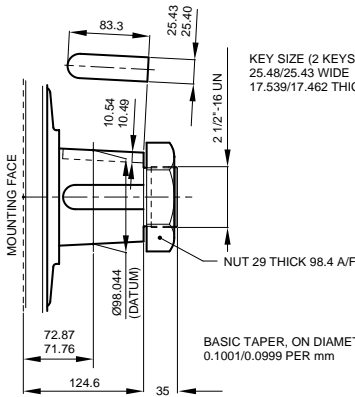


BASIC TAPER, ON DIAMETER  
0.1001/0.0999 PER mm




<p>Model Staffa</p>	<p>Page 63.70</p>	<p>Data Sheet M-1001/03.00</p>
-------------------------	-----------------------	------------------------------------

**HMHDB270/325 Shaft Specification**


**SHAFT TYPES 'Z' & 'HZ'  
24 SPLINES TO DIN 5480**

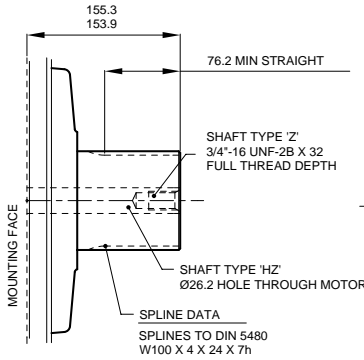


**SHAFT TYPES 'S5' & 'HS5'  
23 SPLINES TO BS 3550-1963**

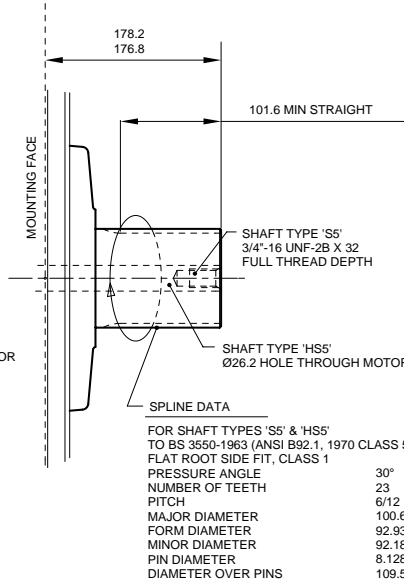

**SHAFT TYPE 'X'  
SHORT TAPER WITH 2 KEYS**

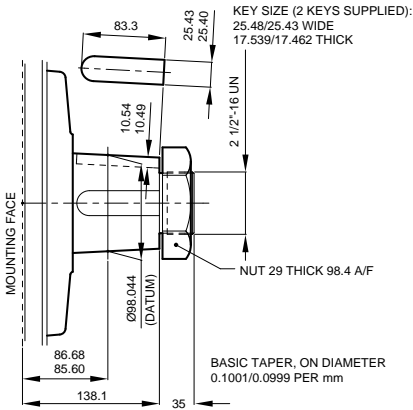

**SHAFT TYPES 'P2' & 'HP2'  
CYLINDRICAL SHAFT WITH KEY**

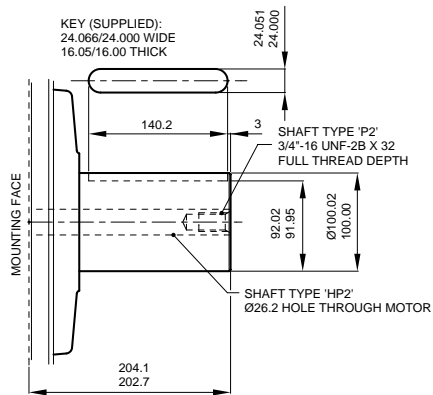

Model  
Staffa


Page  
64.70

Data Sheet  
M-1001/03.00



**HMHDB270/325 Valve Housings**  
**4" Valve Housing with 6-Bolt Flange, "S04"**

**SUPPLIED WITH 2 'O' RING SEALS**

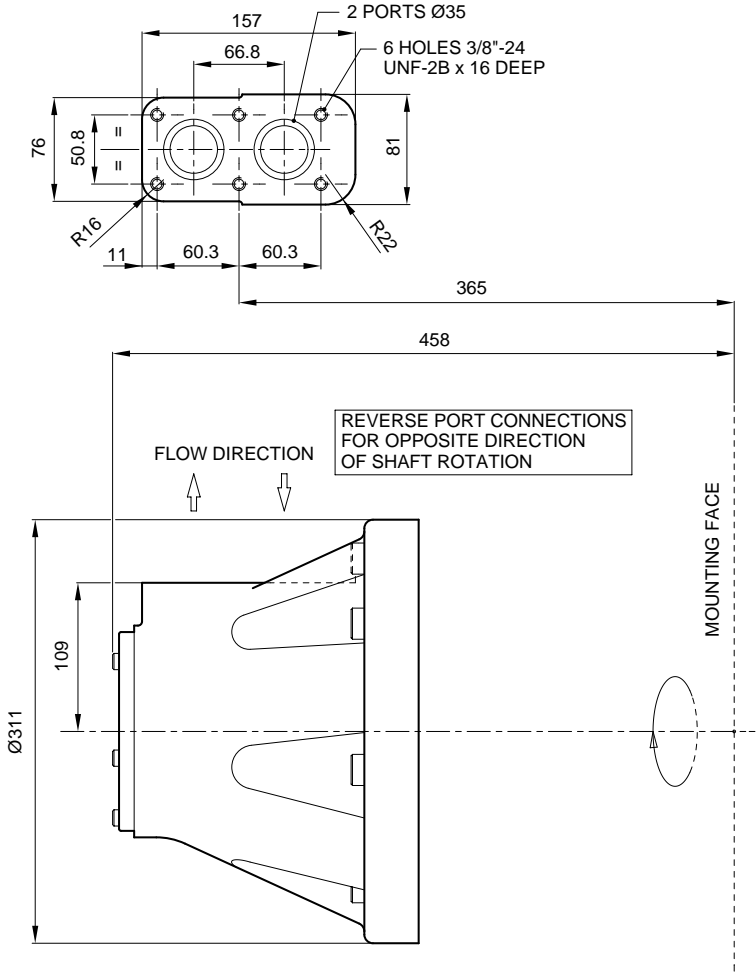

Model Staffa
--------------

Page 65.70
------------

Data Sheet M-1001/03.00
-------------------------








**HMHDB400 Valve Housings**  
**Dual Port, 6-Bolt HDB400 Valve Housing**

**DUAL PORT, 6-BOLT FLANGE CONNECTION, 'SO45'**

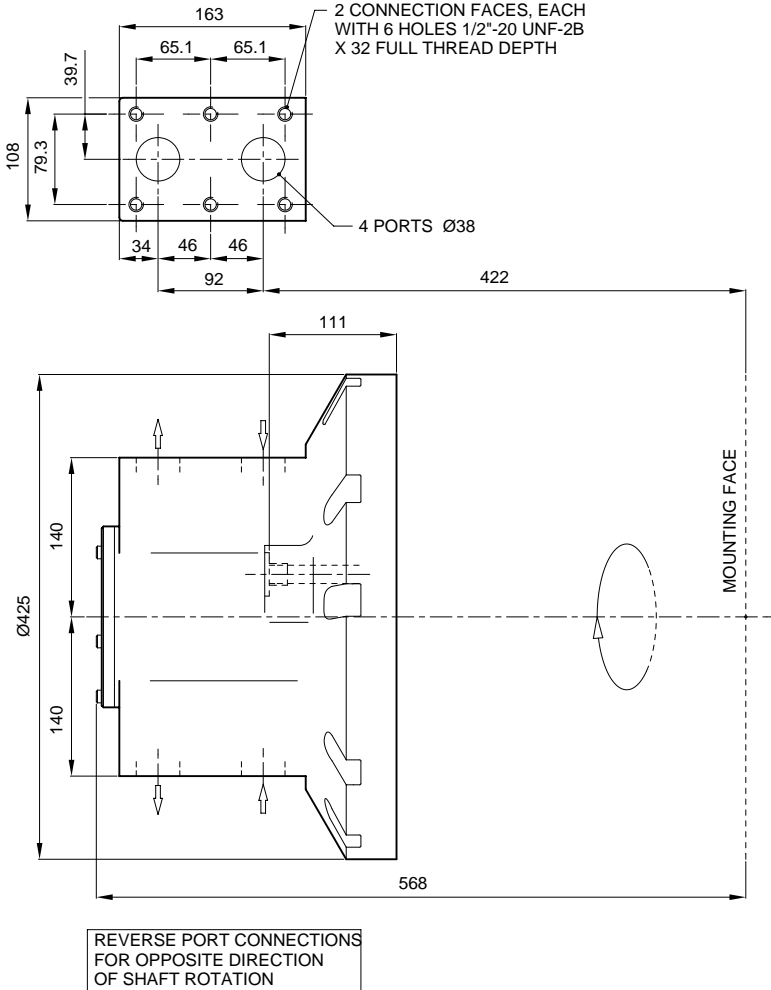

Model  
Staffa

Page  
68.70


Data Sheet  
M-1001/03.00






**HMB700 Shaft Specification**

**SHAFT TYPE 'Z'**  
**28 SPLINES TO DIN 5480.**

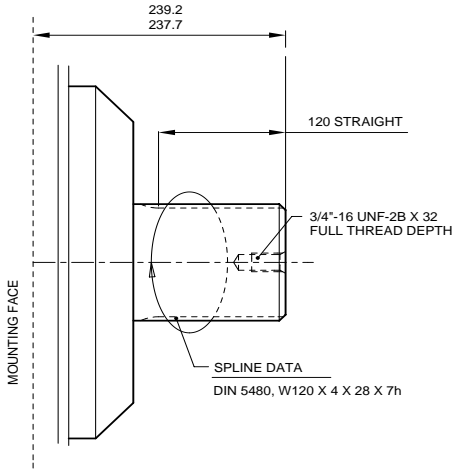

**SHAFT TYPE 'P'**  
**CYLINDRICAL SHAFT WITH 2 KEYS.**

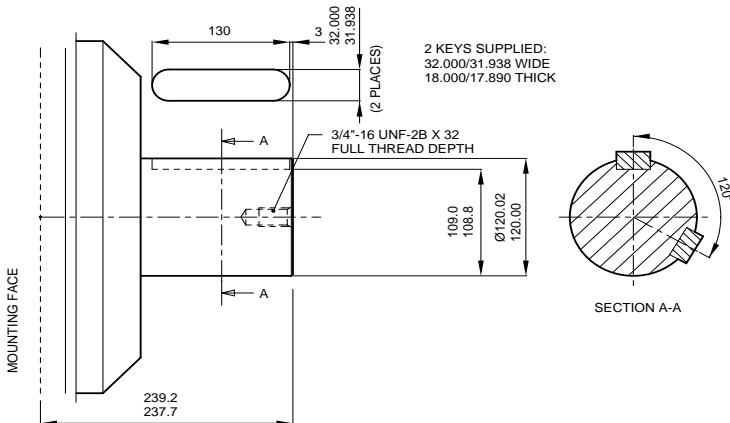

KAWASAKI PRECISION MACHINERY (UK) LTD  
 Ernesettle, Plymouth, Devon, PL5 2SA, England  
 Tel: +44 1752 364394 Fax: +44 1752 364816  
 E Mail: info@kpm-uk.co.uk  
 Web site: <http://www.kpm-uk.co.uk>

The specified data is for product description purposes only and may not be deemed to be guaranteed unless expressly confirmed in the contract

ALL RIGHTS RESERVED, SUBJECT TO REVISION

Model  
 Staffa

Page  
 70.70

Data Sheet  
 M-1001/03.00

